

Overview



SITRANS WS300 is a low- to high-resolution shaft-driven speed sensor.

Benefits

- Compact and economical
- Easy, low-cost installation
- Accurate belt speed detection
- Optional resolutions for measurement over a range of belt speeds
- Corrosion resistant

Application

SITRANS WS300 speed sensor operates in conjunction with a conveyor belt scale, providing a signal to an integrator which computes the rate of material being conveyed. At only 1.22 kg (2.68 lb), it is one of the lightest and most durable units ever developed for monitoring conveyor belt speed. With its rugged cast aluminum housing, it is suitable for outdoor installation, and its low weight prolongs bearing life.

It is directly coupled to a rotating tail or bend pulley shaft to ensure accurate belt-travel readout, eliminating problems caused by belt slippage or material build-up. The WS300 converts shaft rotation into a pulse train of 32, 256, 1 000, or 2 000 pulses per revolution using a high precision rotary optical encoder. The digital signal is transmitted as speed input to any Siemens integrator for calculation of belt speed, flow rate and totalized weight.

This low- to high-resolution speed sensor provides a frequency signal proportional to the shaft speed, enabling a range of speeds to be read accurately. The quadrature type shaft encoder prevents erroneous speed signals due to vibration or shaft oscillation. The WS300 is easily mounted and is bi-directional for either clockwise or counter-clockwise belt travel.

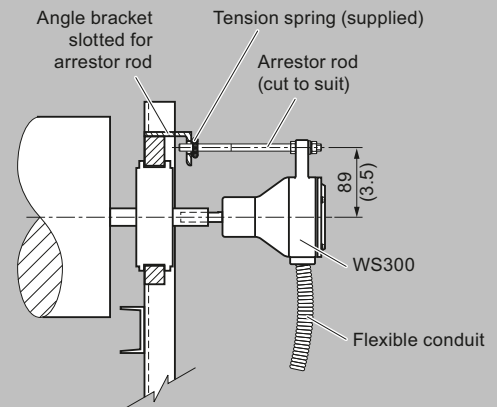
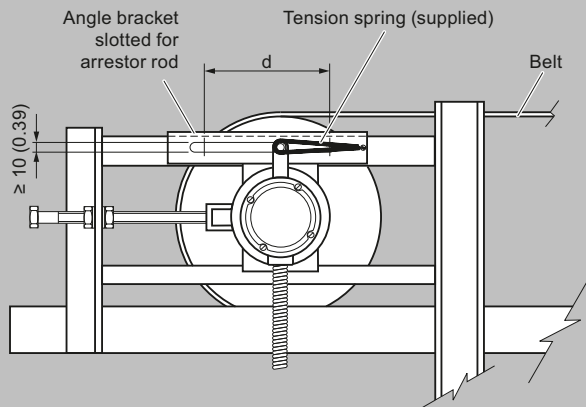
The IS version uses an inductive proximity switch detecting rotating targets.

SITRANS WS300

Design

Mounting

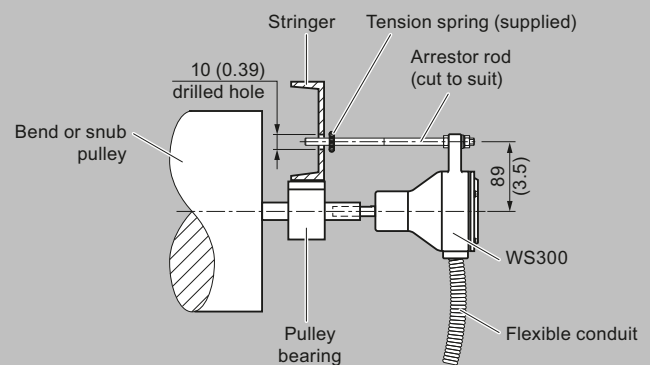
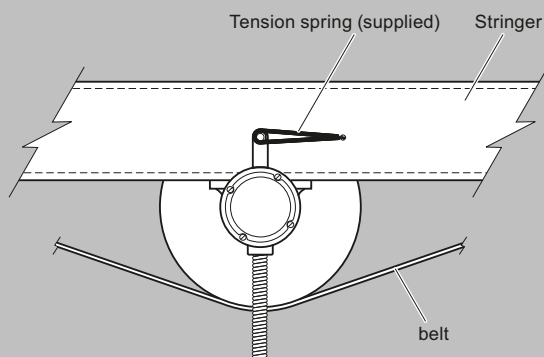
Mounting to a Tail Pulley

**Notes:**

Distance 'd' is the take-up travel on the tail pulley.

When adjusting the belt take-up, ensure that there is play on the arrestor rod. If the arrestor rod is pushed against the end of its travel slot, premature bearing wear may result.

Mounting to a Bend or Snub Pulley

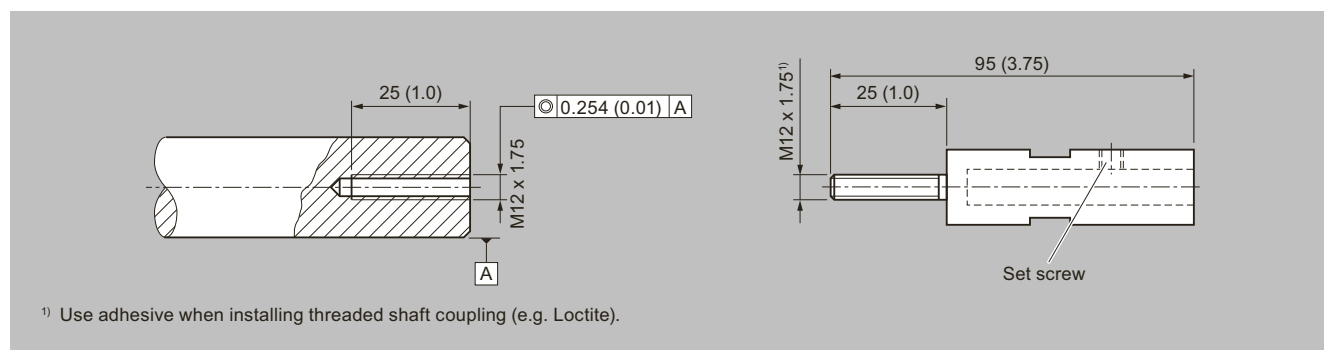
**Notes:**

When mounting to a bend or a snub pulley only, a 10 mm (0.39 inch) drilled hole is required for the arrestor rod.

WS300 mounting, dimensions in mm (inch)

Design (continued)

Mounting using optional threaded shaft coupling



WS300 mounting using threaded shaft coupling, dimensions in mm (inch)

Selection and ordering data

		Article No.							
SITRANS WS300 Speed sensor		7MH7177-	•	•	•	•	•	•	0
Shaft mounted, 0.3 ... 2 000 rpm, with up to 2 000 pulses per revolution.									
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.									
Resolution (pulses per revolution)									
32		1							
256		2							
1 000		3							
2 000		4							
Enclosure									
C5-M rated polyester painted aluminum, NEMA 4X		A							
304 (1.4301) stainless steel, vibra finish NEMA 4X		B							
Approvals									
CSA/FM Class II, Div. 1, Groups E, F, G, Class III; ATEX II 2D, Ex tb IIIC T70°C Db; UKEX II 2D, Ex tb IIIC T70°C Db; IECEX Ex tb IIIC T70°C Db; EAC Ex Ex tb IIIC T70°C Db X; NEPSI Ex tD A21 IP65 T70°C; CCC, RCM, KC		A							
Ordinary Locations/General Purpose (Non-Ex), CE, UKCA, RCM, EAC, KC		D							
ATEX I M1, II 1 GD, Ex ia I Ma, Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da, Ex h I Ma, Ex h IIC T4 Ga, Ex h IIIC T135°C Da; UKEX I M1, II 1 GD, Ex ia I Ma, Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da, Ex h I Ma, Ex h IIC T4 Ga, Ex h IIIC T135°C Da; IECEX Ex ia I Ma, Ex ia IIC T4 Ga, Ex ia IIIC T135°C Da; EAC Ex P0 Ex ia I Ma X; MSHA, RCM, KC ¹⁾		E							
Connections									
Standard, up to 2 integrators		1							
Multiple, up to 10 integrators		2							
Switch isolator									
Not required		0							
115 V AC ²⁾		1							
230 V AC ²⁾		2							
24 V DC ²⁾		3							

Selection and Ordering Data	Order Code
Further designs	
Please add "-Z" to article no. and specify order code(s).	
Acrylic coated, stainless steel tag [13 x 45 mm (0.5 x 1.75 inch)]: measuring-point number/identification (max. 16 characters), specify in plain text	Y17
Manufacturer's test certificate: according to EN 10204-2.2	C11

SITRANS WS300

Selection and ordering data (continued)

Selection and Ordering Data	Order Code
Operating instructions	
All literature is available to download for free, in a range of languages, at http://www.siemens.com/weighing/documentation	
Spare parts	
Circuit card 32 PPR, up to 2 integrators	7MH7723-1GK
Circuit card 32 PPR, up to 10 integrators	7MH7723-1GL
Circuit card 256 PPR, up to 2 integrators	7MH7723-1GM
Circuit card 256 PPR, up to 10 integrators	7MH7723-1GN
Circuit card 1 000 PPR, up to 2 integrators	7MH7723-1GP
Circuit card 1 000 PPR, up to 10 integrators	7MH7723-1GQ
Circuit card 2 000 PPR, up to 2 integrators	7MH7723-1JL
Circuit card 2 000 PPR, up to 10 integrators	7MH7723-1JM
Circuit card 32 PPR, IS	7MH7723-1HC
Rubber coupling	7MH7723-1CM
Coupling hub for 32, 256 PPR versions	7MH7723-1CN
Coupling hub for 1 000, 2 000 PPR versions	7MH7723-1GR
Enclosure cover	7MH7723-1CJ
Enclosure cover, stainless steel	7MH7723-1GS
Enclosure bearing assembly, stainless steel	7MH7723-1GT
Threaded shaft coupling	7MH7723-1GH
Arrestor rod	7MH7723-1FV
Arrestor rod tension spring	7MH7723-1CP
Cable for speed sensor connection to termination box 3 cond, 18G (order per meter) ³⁾	7MH7723-1JP
Cable for IS speed sensor connection to termination box 3 cond, 22G (order per meter) ³⁾	7MH7723-1JQ
Pepperl+Fuchs IS switch isolator, 115 V AC	7MH7723-1EB
Pepperl+Fuchs IS switch isolator, 230 V AC	7MH7723-1EC
Phoenix Contact IS switch isolator 24 V DC	A5E50367888

¹⁾ Approval option E requires use of switch isolator to interface with the belt scale integrator, and is available with Resolution option 1, and Connections option 1 only.

²⁾ For use with approval option E.

³⁾ Cable length orders exceeding 150 m (500 ft) may not be supplied as a continuous length.

Technical specifications

SITRANS WS300	
Mode of operation	
Measuring principle	Standard: pulse from shaft rotation using high precision rotary optical encoder IS: pulse from inductive proximity switch
Typical application	When a low- to high-resolution speed sensor is required
Input	Shaft rotation 0.3 ... 2 000 rpm, bi-directional, resolution dependent
Output	<ul style="list-style-type: none"> Unidirectional open collector, NPN, sinking output Standard: 10 ... 30 V DC, 25 mA max. IS: NAMUR NC, load current, 0 ... 15 mA 32, 256, 1 000, or 2 000 pulses per revolution (ppr) 32 ppr: 2 000 max. rpm, 1 066 Hz 256 ppr: 2 000 max. rpm, 8 530 Hz 1 000 ppr: 900 max. rpm, 15 000 Hz 2 000 ppr: 450 max. rpm, 15 000 Hz

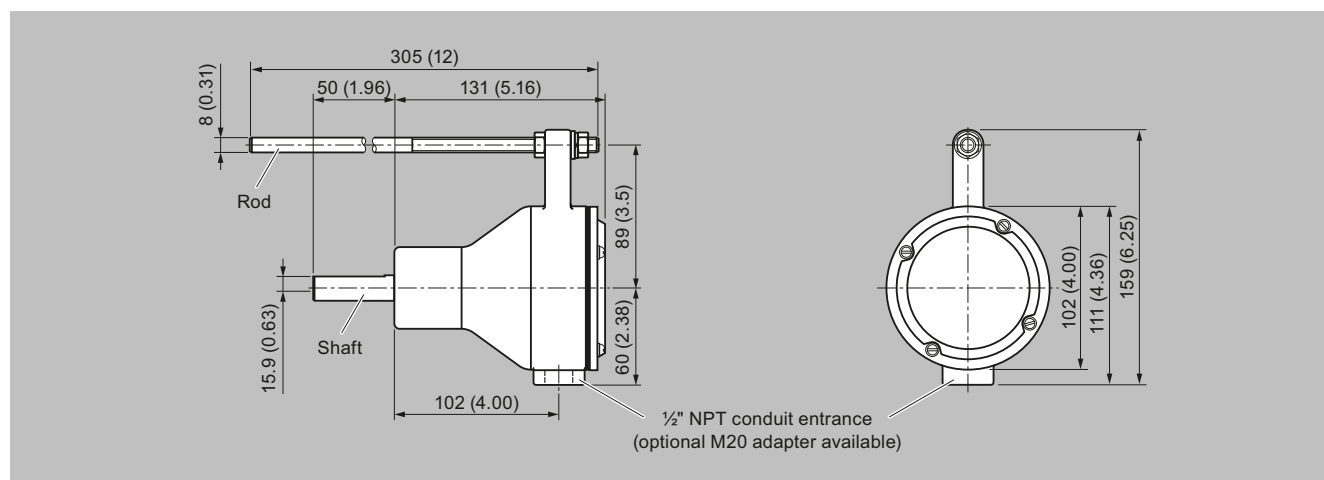
Technical specifications (continued)

SITRANS WS300	
Rated operating conditions	
Ambient temperature	Standard: -40 ... +70 °C (-40 ... +158 °F) IS: -25 ... +100 °C (-13 ... +212 °F)
Degree of protection	NEMA 4X, Type 4X, IP65
Design	
Enclosure	<ul style="list-style-type: none"> Rated NEMA 4X, Type 4X, IP65 Painted aluminum Stainless steel (optional)
Power supply	
	<ul style="list-style-type: none"> Standard: 10 ... 30 V DC, 60 mA max. IS: 5 ... 16 V DC, 25 mA max. (from IS switch isolator)
Cable	
Recommended	<ul style="list-style-type: none"> Standard: 3-wire shielded, 0.82 mm² (18 AWG) IS: 2-wire shielded 0.324 mm² (22 AWG) Max. run 305 m (1 000 ft)
Approvals	
WS300 Standard	<ul style="list-style-type: none"> General CE, UKCA, RCM, EAC, KC

Technical specifications (continued)

SITRANS WS300	
Hazardous	<ul style="list-style-type: none"> • CSA/FM Class II, Div. 1, Groups E, F, G; Class III • ATEX I M1, ATEX II 2D, Ex tb IIIC T70°C Db • UKEX I M1, UKEX II 2D, Ex tb IIIC T70°C Db • MSHA • EAC Ex, RTN • IECEx Ex tb IIIC T70°C Db
Optional switch isolator (required for WS300 IS)	<ul style="list-style-type: none"> • ATEX II 1G [Ex ia] IIC • ATEX II 1D [Ex ia] IIIC • CSA/UL: Class 1, Div. 1, Groups A, B, C, and D, Class II, Div. 1, Groups E, F, and G, Class III • CE, UKCA
<ul style="list-style-type: none"> • Pepperl+Fuchs #KFA5-SOT2-Ex2, #KFA6-SOT2-Ex2, or Phoenix Contact MACX MCR-EX-SL-NAM-2T 	

Dimensional drawings



WS300, dimensions in mm (inch)

Circuit diagrams

Connections (Standard)

Description	Terminal
10 ... 30 V DC	1
Speed out-CW	2
Speed out-CCW	3
Common	4
Ground	GND

- Determine the pulley shaft rotation on the end of the pulley shaft to which the WS300 is attached.
- If the pulley shaft is rotating clockwise, connect the appropriate wire to terminal 2. If the pulley shaft is rotating counter-clockwise, connect the appropriate wire to terminal 3.
- Do not connect terminals 2 and 3 at the same time.
- Connection between the WS300 standard unit and the integrator should be made with three-wire shielded, 0.82 mm² (18 AWG) cable.
- Ground shield of cable at integrator only.
- Connect shield to appropriate terminal at the integrator.

SITRANS WS300

Circuit diagrams (continued)

Terminal Connections to integrator

WS300	1 +V	2 CW	3 CCW	4 Cmn	GND
Milltronics BW500	19	16	16	17	N/C
SIWAREX FTC	Cl+, 1L+	Cl-	Cl-	1M	N/C
SIWAREX WP241	1L+	DI.0	DI.0	2M, 1M	N/C

Connections (IS)

Description	Terminal
5 ... 16 V DC, 25 mA max. (from IS Switch Isolator)	1
Speed out	2
Ground	GND

- Only terminals 1 and 2 are required; rotation in a clockwise or counter-clockwise direction is not required.
- To connect the switch isolator, use two-wire shielded 0.324 mm² (22 AWG) cable. Use the same cable to connect the switch isolator to the integrator.
- Ground shield of cable at integrator only.
- Connect shield to appropriate terminal at the integrator.

Terminal Connections to integrator

W300 IS	IS Switch Isolator Terminal		Milltronics BW500	SIWAREX FTC	SIWAREX WP241
	P&F	Phoenix			
1	3	4.2			
2	1	4.1			
	7	3.1	16	1L+	1L+
	8	3.2	17	Cl+	Cl+