

HART 7 temperature converter, loop-powered

3337

- High accuracy, better than 0.05% of span
- Slimline housing of 6 mm
- Excellent EMC performance
- Selectable 60 ms / 60 s response time
- Pre-calibrated temperature ranges selectable via DIP-switches



Application

- The 3337 temperature converter measures a standard Pt100, TC J and K temperature sensor, and provides an isolated passive analog current and HART signal output.
- High 2 port isolation provides surge suppression and protects the control system from transients and noise.
- The 3337 can be mounted in the safe area or in Zone 2 / Division 2 areas.
- Approved for marine applications.


Technical characteristics

- Flexibly loop powered by 6.2...35 VDC via connectors.
- A 60 ms fast response time with simultaneous sensor error detection when selected.
- Selectable internal/external CJC.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Meeting the NAMUR NE21 recommendations, the 3337 provides top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- All terminals are protected against overvoltage and polarity error.
- High galvanic isolation of 2.5 kVAC.
- Excellent signal/noise ratio of > 60 dB.

Mounting / installation / programming

- Selectable HART mode with HART 7 revision protocol enables extended device programming.
- Selectable DIP-mode for easy configuration of more than 1000 factory calibrated measurement ranges with HART read only feature.
- The narrow 6 mm housing allows up to 165 units to be mounted per meter of DIN rail, without any air gap between units.
- Wide ambient temperature range of -25...+70°C.

Applications

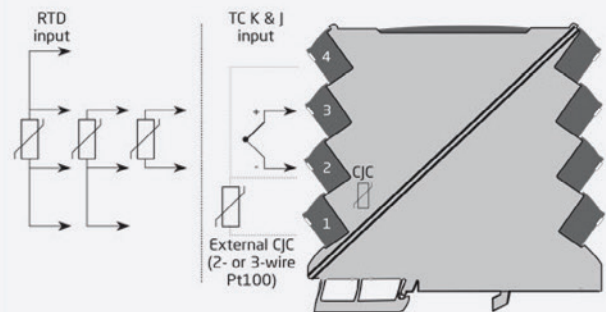

*Safe Area or
Zone 2 & Cl. 1, Div. 2, gr. A-D*

