

Overview

Pointek CLS200 (standard version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe.

Benefits


- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- 3 LED indicators for sensor status, output status, and power
- Suitable for API 2350

Application

Pointek CLS200 standard version has 3 LED indicators with basic relay and solid-state switch alarms. Universal switch for solids/liquids and interface.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 250 V AC/DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).


- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

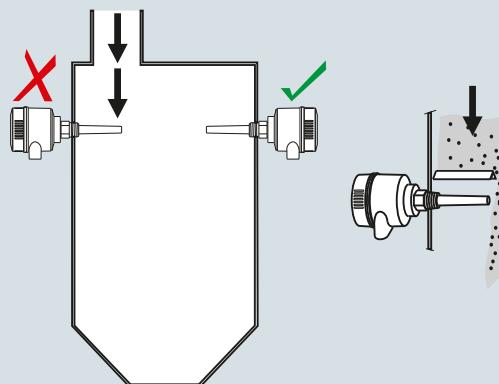Configuration**Installation**

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

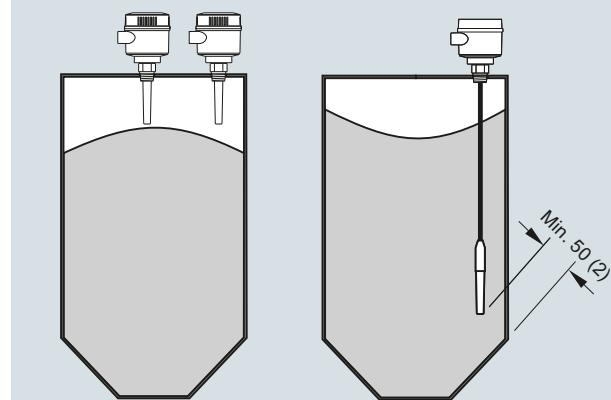

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Technical specifications

Mode of operation		Design
Measuring principle	Inverse frequency shift capacitive level detection	Material • Enclosure • Optional thermal isolator
Input		316L stainless steel Epoxy-coated aluminum with gasket
Measured variable	Change in picoFarad (pF)	Removable terminal block, max. 2.5mm ²
Output		Degree of protection IP65/Type 4/NEMA 4 (optional IP68)
Output signal	1 SPDT Form C relay	Cable inlet 2 x M20 x 1.5 thread (option: 2 x ½" NPT conduit entry including 1 plugged entry)
• Relay output	• 30 V DC	
- Max. contact voltage	• 250 V AC	
- Max. contact current	• 5 A DC	
- Max. switching capacity	• 8 A AC	
	150 W DC	
	2 000 VA AC	
	1 ... 60 s	
• Solid-state output	Galvanically isolated	Power supply 12 ... 250 V AC/DC, 0 ... 60 Hz max. 2 W
- Output	Against reversed polarity (bipolar)	
- Protection	• 30 V DC	CSA, FM, CE, RCM
- Max. switching voltage	• 30 V peak AC	ATEX II ½ D T100 °C
- Max. load current	82 mA	ATEX II 1 G EEx d[ia] IIC T6 ... T4
- Voltage drop	< 1 V, typical at 50 mA	ATEX II ½ D T100 °C
- Time delay (pre or post switching)	1 ... 60 s	CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Rated operating conditions¹⁾		Explosion Proof Enclosure With IS Probe CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4
Installation conditions	Indoor/outdoor	Marine Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
• Location		Overfill Protection WHG (Germany) VLAREM II
Ambient conditions		Others Pattern Approval (China), SIL
• Ambient temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾	
• Storage temperature	-40 ... +85 °C (-40 ... +185 °F)	
• Installation category	II	
• Pollution degree	4	
Medium conditions	Liquids, bulk solids, slurries and interfaces Min. 1.5	
• Relative dielectric constant ϵ_r		
• Process temperature	-40 ... +85 °C (-40 ... +185 °F) ²⁾	
- Without thermal isolator	-40 ... +125 °C (-40 ... +257 °F)	
- With thermal isolator	-1 ... +25 bar g (-14.6 ... +365 psi g) (nominal)	
• Process pressure (rod version)	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
• Process pressure (cable version) ³⁾	-1 ... +10 bar g (-14.6 ... +150 psi g) (nominal)	
• Process pressure (sliding coupling version)		
Electromagnetic compatibility		
	To comply with CE EMC regulations (where applicable); the CLS200 should be installed per the instruction manual.	

¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/34.

²⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

³⁾ Pressure rating of process seal is temperature dependent.
See Pressure/Temperature curves on page 5/34.

Technical specifications (continued)**Design: Probe**

	Rod version	Sanitary version	Cable version	Sliding Coupling version
Max. length	5 500 mm (216.53 inch)	5 500 mm (216.53 inch)	<ul style="list-style-type: none"> • 30 000 mm (1 181.1 inch) liquids and slurries • 5 000 mm (196.85 inch) solids (under loads) 	5 500 mm (216.53 inch)
Process connection	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 $\frac{1}{2}$ ", 2" sanitary fitting clamp 316L stainless steel	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]
	$\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1]		$\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1]	$\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1]
	G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]		G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
	316L stainless steel ASME/EN flange		316L stainless steel ASME/EN flange	
Extension material	316L stainless steel optional PFA coated ¹⁾	316L stainless steel	Fluoropolymer propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾
Thermal isolator ³⁾	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length

¹⁾ PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

²⁾ For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit http://www.automation.siemens.com/aspa_app.

³⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard


Selection and ordering data	Article No.	Article No.
Pointek CLS200 RF Capacitance point level switch, rod design Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.	7ML5630- 0	7ML5630- 0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Process connection Threaded, 316L stainless steel ¾" NPT [(Taper), ANSI/ASME B1.20.1] 1" NPT [(Taper), ANSI/ASME B1.20.1] 1¼" NPT [(Taper), ANSI/ASME B1.20.1] 1½" NPT [(Taper), ANSI/ASME B1.20.1] R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	0 A 0 B 0 C 0 D 1 A 1 B 1 C 1 D 3 A 3 B 3 D	M N P Q R S
Welded flange, 316L stainless steel, raised face 1" ASME, 150 lb 1" ASME, 300 lb 1" ASME, 600 lb 1½" ASME, 150 lb 1½" ASME, 300 lb 1½" ASME, 600 lb 2" ASME, 150 lb 2" ASME, 300 lb 2" ASME, 600 lb 3" ASME, 150 lb 3" ASME, 300 lb 3" ASME, 600 lb 4" ASME, 150 lb 4" ASME, 300 lb 4" ASME, 600 lb	5 A 5 B 5 C 5 D 5 E 5 F 5 G 5 H 5 J 5 K 5 L 5 M 5 N 5 P 5 Q	0 1
Welded flange, 316L stainless steel, Type A flat faced DN 25, PN 16 DN 25, PN 40 DN 40, PN 16 DN 40, PN 40 DN 50, PN 16 DN 50, PN 40 DN 80, PN 16 DN 80, PN 40 DN 100, PN 16 DN 100, PN 40 (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	6 A 6 B 6 C 6 D 6 E 6 F 6 G 6 H 6 J 6 K	2 3
Probe length (length from flange face) (threaded lengths include process thread)	A B C D E F G H J K L	0 1 C D E F G H J K A B C D
Note: No Y01 needed in Order code for standard lengths Compact [threaded 120 mm (4.72 inch), Flanged 98 mm (3.86 inch)] Extended rod, 250 mm (9.84 inch) Extended rod, 350 mm (13.78 inch) Extended rod, 500 mm (19.69 inch) Extended rod, 750 mm (29.53 inch) Extended rod, 1 000 mm (39.37 inch) Extended rod, 1 250 mm (49.21 inch) Extended rod, 1 350 mm (53.15 inch) Extended rod, 1 500 mm (59.06 inch) Extended rod, 1 750 mm (68.90 inch) Extended rod, 2 000 mm (78.74 inch)		
Pointek CLS200 RF Capacitance point level switch, rod design Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.		
Add Order code Y01 and plain text: "Insertion length ... mm"		
Extended rod, 210 ... 1 000 mm (8.27 ... 39.37 inch) Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch) Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch) Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch) Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch) Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)		
Thermal isolator Without thermal isolator With thermal isolator [for process connection temperatures over 85 °C (185 °F)]		
Remote mount electronics and mounting bracket With 2 m (79 inch) of cable ¹⁾²⁾ With 5 m (197 inch) of cable ¹⁾²⁾		
Wetted seals FKM FFKM [for process temperatures above -20 °C (-4 °F)]		
Probe material 316L stainless steel with PPS probe body 316L stainless steel with PVDF probe body		
Approvals Dust Ignition Proof:CE, RCM, ATEX II 1/2 D T100 °C Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C Flameproof Enclosure with IS Probe, with WHG approval: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G, CSA/FM Class III T4 Explosion Proof Enclosure with IS Probe:CSA/FM Class I, Div. 1, Groups A, B, C, D, CSA/FM Class II, Div. 1, Groups E, F, G, CSA/FM Class III T4 General Purpose (CSA, FM) General Purpose (CE, RCM) General Purpose (CSA, FM, CE, RCM) with WHG approval		
Enclosure and lid Aluminum epoxy coated 2 x ½" NPT via adapter - cable inlet, IP65 2 x M20 x 1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20 x 1.5 cable inlet IP68		
1) Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection. 2) Available with Approval options F, G, and H.		

Selection and ordering data	Order code	Article No.
Further designs Please add "-Z" to Article No. and specify Order code(s).		7ML5631-
Total insertion length: enter the total insertion length in plain text description	Y01	Detects level and interface in liquids, solids, slurries, and foam. Cable extension options to 30 m (98.43 ft), adaptable sensitivity, with the ability to tune out build-up on probe.
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15	↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11	Process connection
Material inspection Certificate Type 3.1 per EN 10204	C12	Threaded, 316L stainless steel ¾" NPT [(Taper), ANSI/ASME B1.20.1] 1" NPT [(Taper), ANSI/ASME B1.20.1] 1½" NPT [(Taper), ANSI/ASME B1.20.1] 1¾" NPT [(Taper), ANSI/ASME B1.20.1] R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]	C20	Welded flange, 316L stainless steel, raised face
INMETRO ¹⁾	E34	1" ASME, 150 lb 1" ASME, 300 lb 1" ASME, 600 lb 1½" ASME, 150 lb 1½" ASME, 300 lb 1½" ASME, 600 lb 2" ASME, 150 lb 2" ASME, 300 lb 2" ASME, 600 lb 3" ASME, 150 lb 3" ASME, 300 lb 3" ASME, 600 lb 4" ASME, 150 lb 4" ASME, 300 lb 4" ASME, 600 lb
Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation	See page 4/41	Welded flange, 316L stainless steel, Type A flat faced DN 25, PN 16 DN 25, PN 40 DN 40, PN 16 DN 40, PN 40 DN 50, PN 16 DN 50, PN 40 DN 80, PN 16 DN 80, PN 40 DN 100, PN 16 DN 100, PN 40 (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)
Accessories		5 A 5 B 5 C 5 D 5 E 5 F 5 G 5 H 5 J 5 K 5 L 5 M 5 N 5 P 5 Q 6 A 6 B 6 C 6 D 6 E 6 F 6 G 6 H 6 J 6 K

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

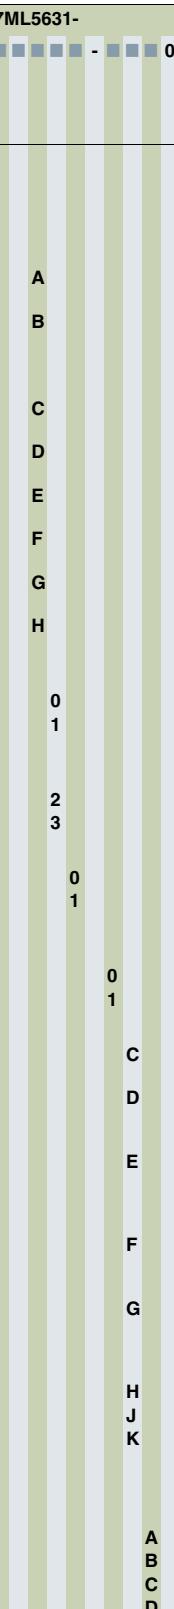Selection and ordering data	Article No.	Order code
Pointek CLS200 RF Capacitance point level switch, cable design Detects level and interface in liquids, solids, slurries, and foam. Cable extension options to 30 m (98.43 ft), adaptable sensitivity, with the ability to tune out build-up on probe.	7ML5631- 	
Probe length (length from flange face) (threaded lengths include process thread) Note: No Y01 needed in Order code for standard lengths		Further designs Please add "-Z" to Article No. and specify Order code(s).
Extended cable, 3 000 mm (118.11 inch), length can be determined by customer on assembly ¹⁾	A	Total insertion length: enter the total insertion length in plain text description
Extended cable, 6 000 mm (236.22 inch), length can be determined by customer on assembly ¹⁾	B	Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text
Add Order code Y01 and plain text: "Insertion length ... mm"	C	Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000
Extended cable, 500 ... 5 000 mm (19.69 ... 196.85 inch)	D	Material inspection Certificate Type 3.1 per EN 10204
Extended cable, 5 001 ... 10 000 mm (196.89 ... 393.70 inch)	E	SIL/IEC 61508 Declaration of Conformity [SIL 2 (overspill)]
Extended cable, 10 001 ... 15 000 mm (393.74 ... 590.55 inch)	F	INMETRO ¹⁾
Extended cable, 15 001 ... 20 000 mm (590.59 ... 787.4 inch)	G	
Extended cable, 20 001 ... 25 000 mm (787.44 ... 984.25 inch)	H	Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation
Extended cable, 25 001 ... 30 000 mm (984.29 ... 1 181.1 inch)	I	
Thermal isolator Without thermal isolator With thermal isolator [for process connection temperatures over 85 °C (185 °F)]	J	
Remote mount electronics and mounting bracket With 2 m (79 inch) of cable ²⁾ With 5 m (197 inch) of cable ²⁾	K	
Wetted seals FKM and PTFE FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]	L	Accessories
Probe material FEP jacketed cable with PPS probe body FEP jacketed cable with PVDF probe body	M	See page 4/41
Approvals Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C Flameproof Enclosure with IS Probe, with WHG approval: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G, CSA/FM Class III T4 Explosion Proof Enclosure with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D, CSA/FM Class II, Div. 1, Groups E, F, G, CSA/FM Class III T4 General Purpose (CSA, FM) General Purpose (CE, RCM) General Purpose (CSA, FM, CE, RCM) with WHG approval	N	
Enclosure and lid Aluminum epoxy coated 2 x ½" NPT via adapter - cable inlet, IP65 2 x M20 x 1.5 cable inlet, IP65 2 x ½" NPT via adapter - cable inlet, IP68 2 x M20 x 1.5 cable inlet, IP68	O	

¹⁾ Sensor detached to allow customer to set desired cable length.

²⁾ Available with Approvals options F ... H.

Selection and ordering data**Article No.****Article No.****Pointek CLS200 RF Capacitance point level switch, sanitary rod design**

Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Process connectionSanitary 316L stainless steel

1" sanitary fitting clamp

1½" sanitary fitting clamp

2" sanitary fitting clamp

2½" sanitary fitting clamp

3" sanitary fitting clamp

(Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard)

Probe length

(length from process connection face)

Note: No Y01 needed in Order code for standard lengths

Compact, 98 mm (3.86 inch)

Extended rod, 250 mm (9.84 inch)

Extended rod, 350 mm (13.78 inch)

Extended rod, 500 mm (19.69 inch)

Extended rod, 750 mm (29.53 inch)

Extended rod, 1 000 mm (39.37 inch)

Extended rod, 1 250 mm (49.21 inch)

Extended rod, 1 350 mm (53.15 inch)

Extended rod, 1 500 mm (59.06 inch)

Extended rod, 1 750 mm (68.90 inch)

Extended rod, 2 000 mm (78.74 inch)

Add Order code Y01 and plain text:

"Insertion length ...mm"

Extended rod, 110 ... 350 mm (4.3 ... 13.78 inch)

Extended rod, 351 ... 1 000 mm

(13.78 ... 39.37 inch)

Extended rod, 1 001 ... 2 000 mm

(39.41 ... 78.74 inch)

Extended rod, 2 001 ... 3 000 mm

(78.78 ... 118.11 inch)

Extended rod, 3 001 ... 4 000 mm

(118.15 ... 157.48 inch)

Extended rod, 4 001 ... 5 000 mm

(157.52 ... 196.85 inch)

Extended rod, 5 001 ... 5 500 mm

(196.89 ... 216.53 inch)

Thermal isolator

Thermal isolator

With thermal isolator [for process connection temperatures over 85 °C (185 °F)]

Remote mount electronics and mounting bracket

Remote mount electronics and mounting bracket

Remote mount electronics with 5 m (197 inch) of cable

Wetted seals

FKM

FFKM

[for process temperatures above -20 °C (-4 °F)]

Probe material

316L stainless steel with PPS probe body

316L stainless steel with PVDF probe body

Article No.

7ML5632-	0
8 A	A
8 B	B
8 C	C
8 D	D
8 E	E
M	M
N	N
P	P
Q	Q
R	R
S	S
T	T
0	0
1	1
2	2
3	3
0	0
1	1

Pointek CLS200 RF Capacitance point level switch, sanitary rod design

Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.

Approvals

Dust Ignition Proof:

CE, RCM, ATEX II ½ D T100 °C

Flameproof Enclosure with IS Probe:
CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4,
ATEX II ½ D T100 °CFlameproof Enclosure with IS Probe:
CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4,
ATEX II ½ D T100 °CFlameproof Enclosure with IS Probe,
with WHG approval:
CE, RCM, ATEX II ½ G EEx d[ia] IIC T6 ... T4,
ATEX II ½ D T100 °CDust Ignition Proof with IS Probe:
CSA/FM Class II, Div. 1, Groups E, F, G,
CSA/FM Class III T4

General Purpose (CSA, FM)

General Purpose (CE, RCM)

General Purpose (CSA, FM, CE, RCM)
with WHG approval**Enclosure and lid**

Aluminum epoxy coated

2 x ½" NPT via adapter - cable inlet, IP65

2 x M20 x 1.5 cable inlet, IP68

2 x ½" NPT via adapter - cable inlet, IP68

2 x M20 x 1.5 cable inlet, IP68

Article No.

7ML5632-	0
C	C
D	D
E	E
F	F
G	G
H	H
J	J
K	K
A	A
B	B
C	C
D	D

Further designs

Please add "-Z" to Article No.
and specify Order code(s).

Total insertion length: enter the total insertion length
in plain text description**Order code****Y01**Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]:
Measuring-point number/identification
(max. 27 characters) specify in plain text**Y15**Manufacturer's test certificate: M to DIN 55350,
Part 18 and ISO 9000**C11**Material inspection Certificate Type 3.1 per
EN 10204**C12**SIL/IEC 61508 Declaration of Conformity
[SIL 2 (overspill)]**C20**INMETRO¹)**E34****Operating Instructions**All literature is available to download for free, in a
range of languages, at<http://www.siemens.com/processinstrumentation/documentation>**Accessories****See page 4/41**

¹) Available only with Approvals options C, D, E.

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Selection and ordering data

Pointek CLS200 RF Capacitance point level switch, sliding coupling design

Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.

↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Process connection

Threaded, 316L stainless steel

¾" NPT [(Taper), ANSI/ASME B1.20.1]

1" NPT [(Taper), ANSI/ASME B1.20.1]

1¼" NPT [(Taper), ANSI/ASME B1.20.1]

1½" NPT [(Taper), ANSI/ASME B1.20.1]

R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]

G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]

JIS B 0202]

Probe length

(length from flange face)

(threaded lengths include process thread)

Note: No Y01 needed in Order code for standard lengths

Extended rod, 350 mm (13.78 inch)

Extended rod, 500 mm (19.69 inch)

Extended rod, 750 mm (29.53 inch)

Extended rod, 1 000 mm (39.37 inch)

Extended rod, 1 250 mm (49.21 inch)

Extended rod, 1 350 mm (53.15 inch)

Extended rod, 1 500 mm (59.06 inch)

Extended rod, 1 750 mm (68.90 inch)

Extended rod, 2 000 mm (78.74 inch)

Add Order code Y01 and plain text:

"Insertion length ... mm"

Extended rod, 350 ... 1 000 mm

(13.78 ... 39.37 inch)

Extended rod, 1 001 ... 2 000 mm

(39.41 ... 78.74 inch)

Extended rod, 2 001 ... 3 000 mm

(78.78 ... 118.11 inch)

Extended rod, 3 001 ... 4 000 mm

(118.15 ... 157.48 inch)

Extended rod, 4 001 ... 5 000 mm

(157.52 ... 196.85 inch)

Extended rod, 5 001 ... 5 500 mm

(196.89 ... 216.53 inch)

Thermal isolator

Without thermal isolator

With thermal isolator [for process connection temperatures over 85 °C (185 °F)]

Remote mount electronics and mounting bracket

With 2 m (79 inch) of cable¹⁾

With 5 m (197 inch) of cable¹⁾

Wetted seals

FKM and PTFE

FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]

Probe material

316L stainless steel with PPS probe body

316L stainless steel with PVDF probe body

Article No.

7ML5633-
0

0 A
0 B
0 C
0 D
1 A
1 B
1 D
3 A
3 B
3 D

C
D
E
F
G
H
J
K
L

M
N
P
Q
R
S

0
1

2
3

0
1

0
1

Article No.

7ML5633-
0

C
D
E
F
G
H
J
K

A
B
C
D

Y01
Y15
C11
C12
C20
E34

See page 4/41

Pointek CLS200 RF Capacitance point level switch, sliding coupling design

Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe.

Approvals

Dust Ignition Proof:

CE, RCM, ATEX II 1/2 D T100 °C

Flameproof Enclosure with IS Probe:
CE, RCM, ATEX II 1 G EEx d[ia] IIC T6 ... T4,
ATEX II 1/2 D T100 °C

Flameproof Enclosure with IS Probe,
with WHG approval:
CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4,
ATEX II 1/2 D T100 °C

Dust Ignition Proof with IS Probe:
CSA/FM Class II, Div. 1, Groups E, F, G
CSA/FM Class III T4

Explosion Proof Enclosure with IS Probe:
CSA/FM Class I, Div. 1, Groups A, B, C, D
CSA/FM Class II, Div. 1, Groups E, F, G
CSA/FM Class III T4

General Purpose (CSA, FM)

General Purpose (CE, RCM)

General Purpose (CSA, FM, CE, RCM)
with WHG approval

Enclosure and lid

Aluminum epoxy coated

2 x ½" NPT via adapter - cable inlet, IP65

2 x M20 x 1.5 cable inlet, IP65

2 x ½" NPT via adapter - cable inlet, IP68

2 x M20 x 1.5 cable inlet, IP68

¹⁾ Available with Approvals options F ... H.

Further designs

Please add "Z" to Article No.
and specify Order code(s).

Total insertion length: enter the total insertion length
in plain text description

Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]:
Measuring-point number/identification
(max. 27 characters) specify in plain text

Manufacturer's test certificate: M to DIN 55350,
Part 18 and ISO 9000

Material inspection Certificate Type 3.1 per
EN 10204

SIL/IEC 61508 Declaration of Conformity
[SIL 2 (overspill)]

INMETRO¹⁾

Operating Instructions

All literature is available to download for free, in a
range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>


Accessories

See page 4/41

¹⁾ Available only with Approval options C, D, E.

Options


Optional SensGuard

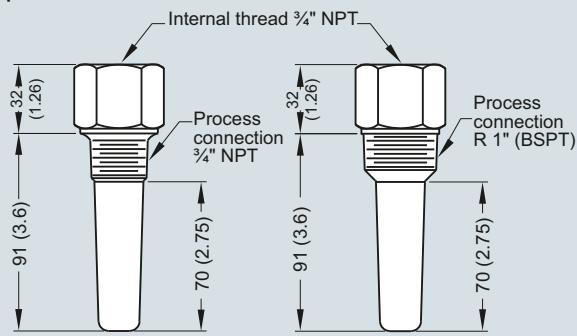

Optional SensGuard, dimensions in mm (inch)

Characteristic curves

Pressure/temperature curve
CLS200 sliding coupling
threaded process connections
 (7ML5633 and 7ML5643)

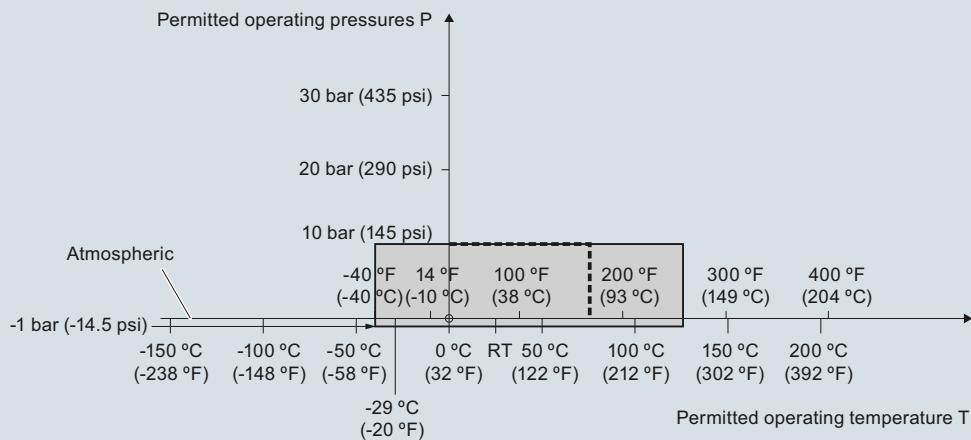

Pointek CLS200 process pressure/temperature derating curves (7ML5633 and 7ML5643)


Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard


Characteristic curves (continued)

Pressure/temperature curve
CLS200 cable
Threaded process connections
 (7ML5631 and 7ML5641)

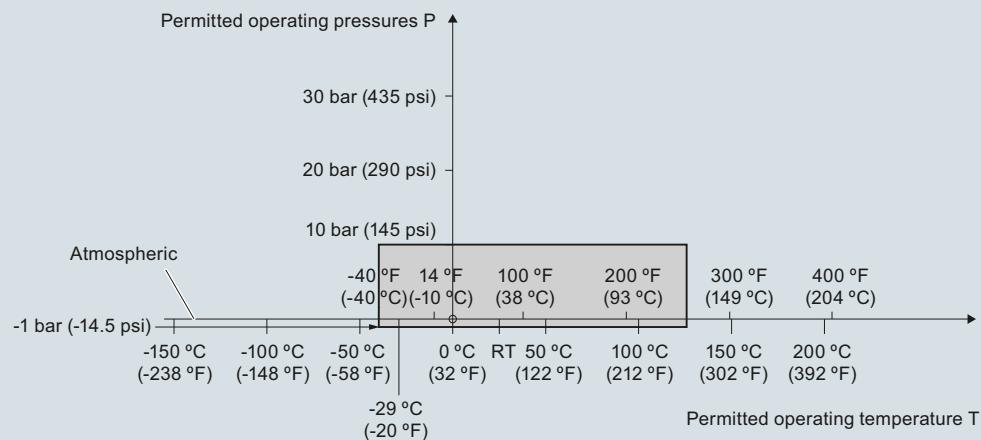

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


Pressure/temperature curve
CLS200 compact and extended rod
Threaded process connections
 (7ML5630 and 7ML5640)

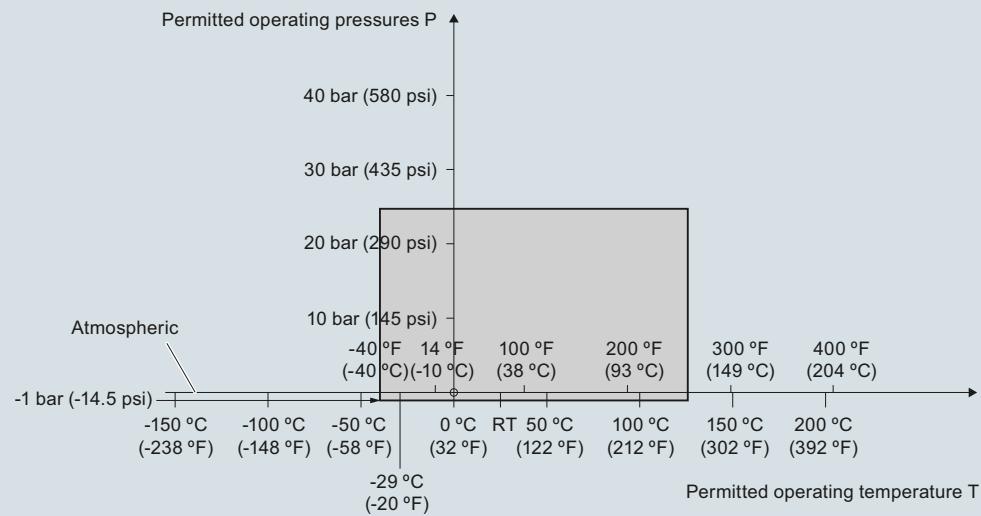

Pointek CLS200 process pressure/temperature derating curves (7ML5630 or 7ML5640)


Characteristic curves (continued)

Pressure/temperature curve
CLS200 compact and extended sanitary type
Sanitary process connections
 (7ML5632 and 7ML5642)

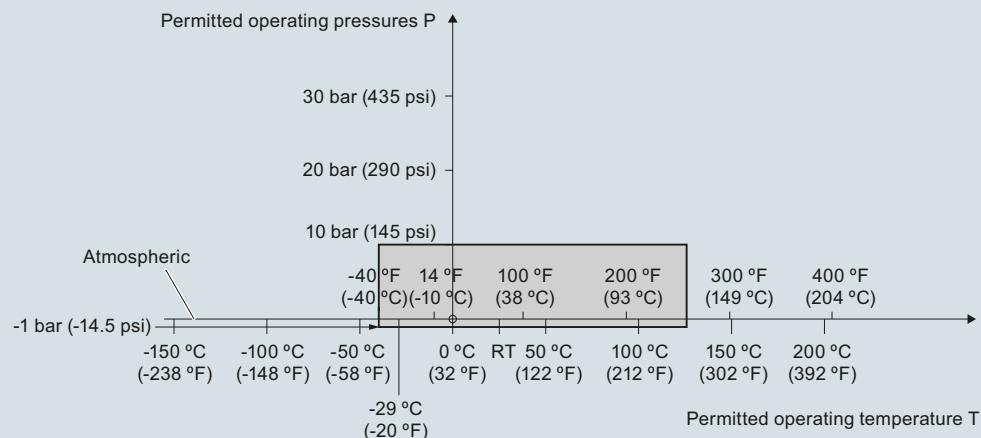

Pointek CLS200 process pressure/temperature derating curves (7ML5632 and 7ML5642)

Pressure/temperature curve
CLS200, cable
ASME flanged process connections
 (7ML5631 and 7ML5641)

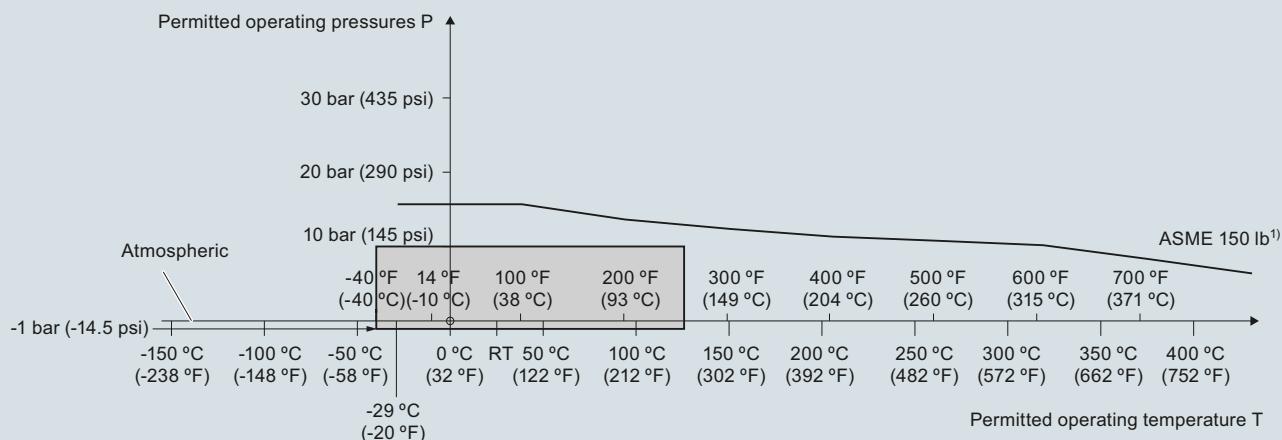

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Characteristic curves (continued)


Pressure/temperature curve
CLS200 compact and extended rod
ASME flanged process connections
(7ML5630 and 7ML5640)

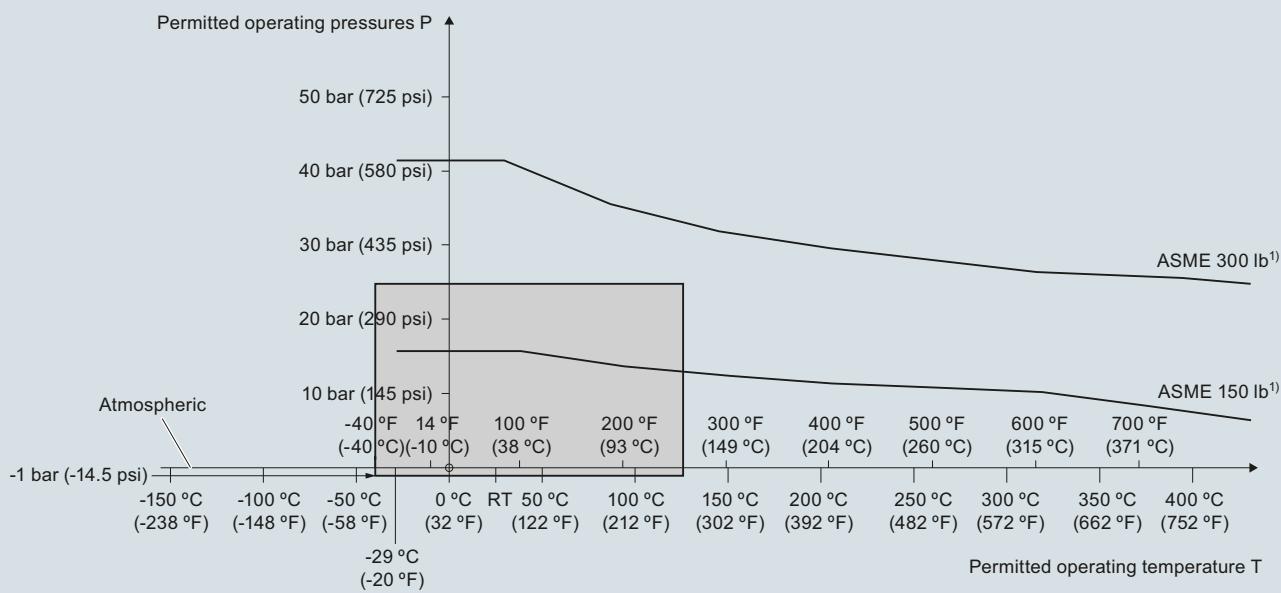

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

Pressure/temperature curve
CLS200 cable
EN flanged process connections
(7ML5631 and 7ML5641)

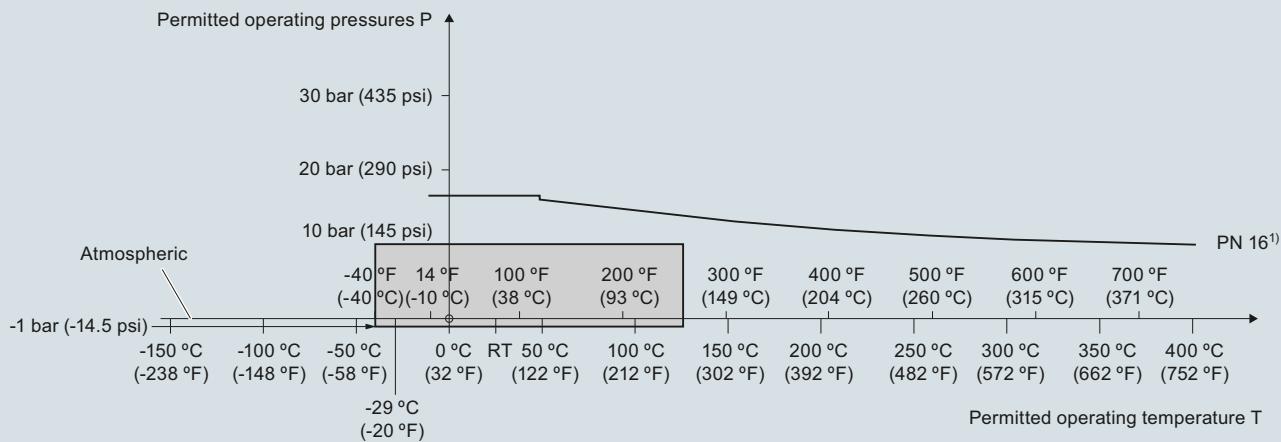


¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

Characteristic curves (continued)

Pressure/Temperature Curve
CLS200 Compact and Extended Rod
EN Flanged Process Connections
(7ML5630 and 7ML5640)

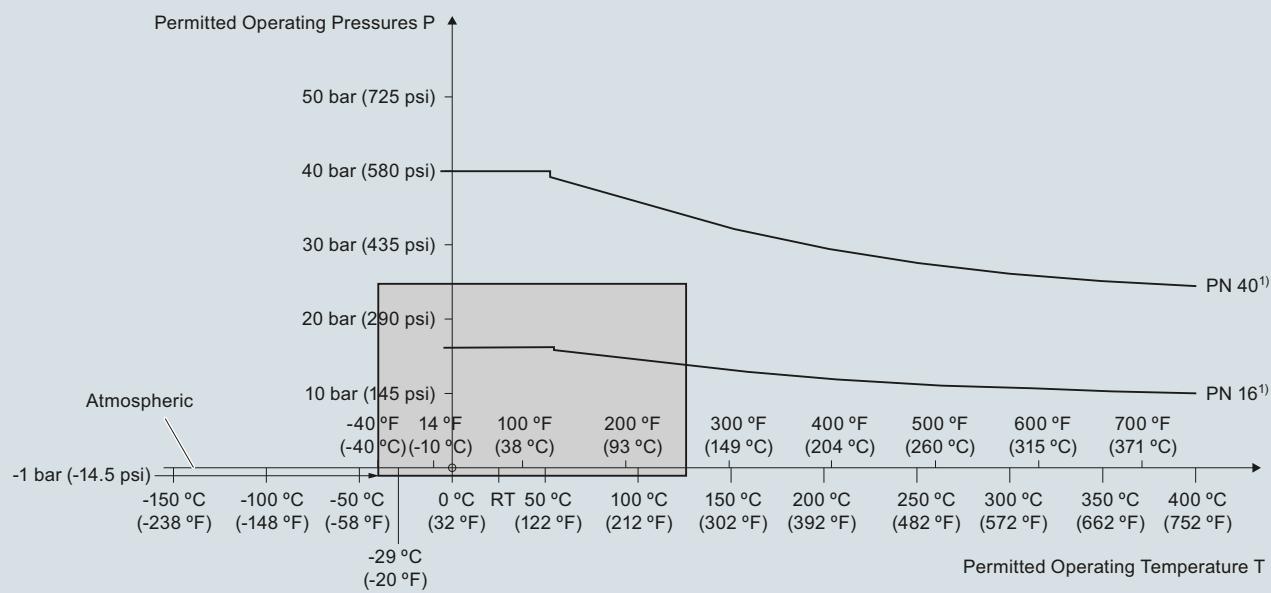

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

Level measurement

Point level measurement
RF Capacitance switches


Pointek CLS200 - Standard

Dimensional drawings

Compact version

Threaded


(7ML5630 and 7ML5640)

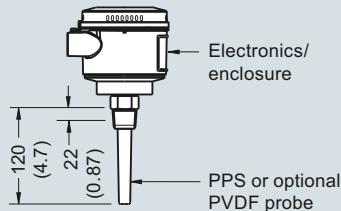

Sanitary compact version

Sanitary fitting


(7ML5632 and 7ML5642)

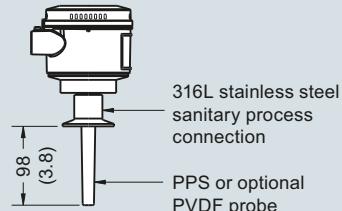

Extended rod version

Threaded

(7ML5630 and 7ML5640)

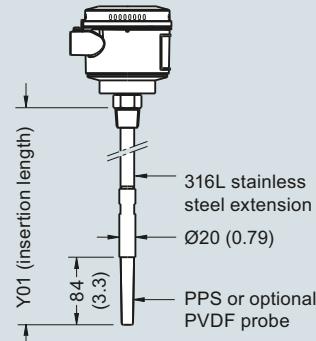


Min. insertion length = 200 (7.87)
Max. insertion length = 5 500 (216)

Extended cable version

Threaded

(7ML5631 and 7ML5641)

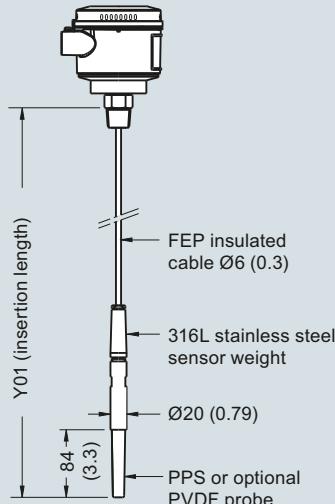

Min. insertion length = 500 (19.69)
Max. insertion length = 30 000 (1 181)
Applicable for liquids and solids applications. Cable can be shortened on site.


2 cable entries
1/2" NPT or
M20 x 1.5



Lid with window

GP, DIP lid,
without window


XP, lid without window

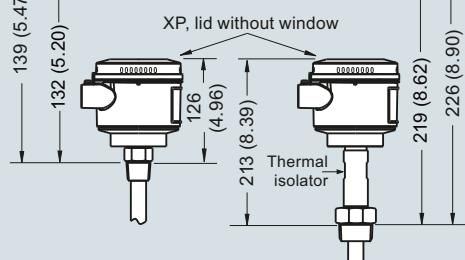

Sanitary extended version

Sanitary fitting

(7ML5632 and 7ML5642)

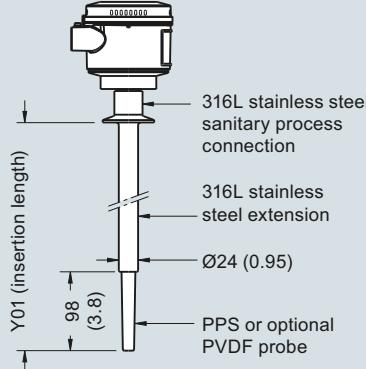


Min. insertion length = 110 (4.3)
Max. insertion length = 5 500 (216)

Sliding coupling version

Threaded

(7ML5633 and 7ML5643)


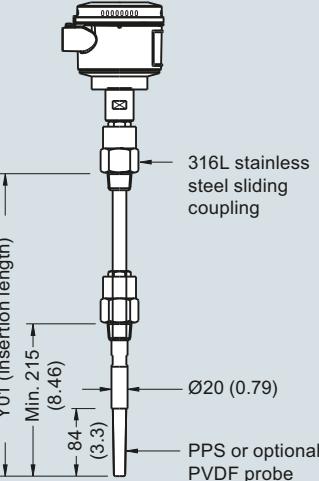


Min. insertion length = 350 (13.82)
Max. insertion length = 5 500 (216)


Pointek CLS200 threaded/sanitary process connection, dimensions in mm (inch)

Dimensional drawings (continued)

Compact version
Welded Flange (7ML5630 and 7ML5640)
Welded Flange, PFA coated
(7ML5634 and 7ML5644)

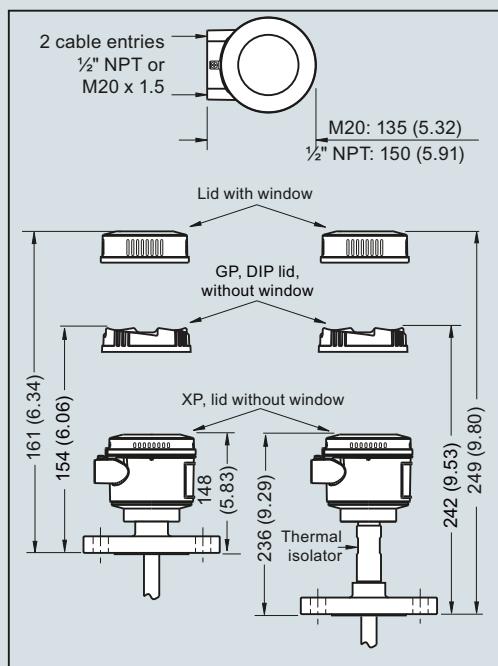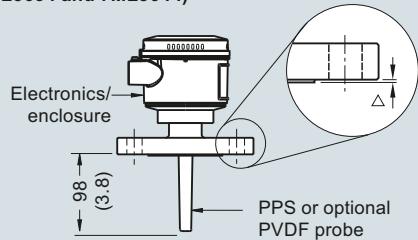


Extended rod version
Welded Flange (7ML5630 and 7ML5640)
Welded Flange, PFA coated
(7ML5634 and 7ML5644)

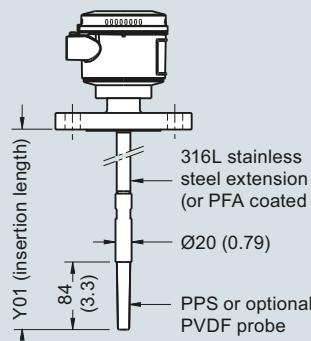

Min. insertion length = 200 (7.87)
 Max. insertion length = 5 500 (216)

Extended cable version
Welded Flange
(7ML5631 and 7ML5641)

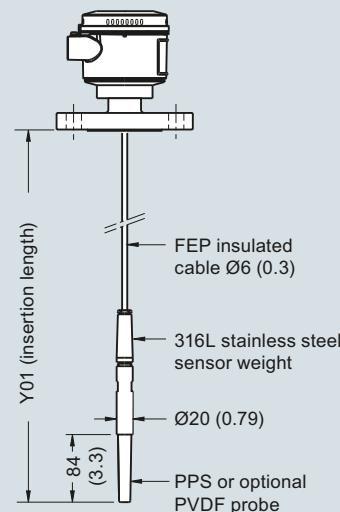

Min. insertion length = 500 (19.69)
 Max. insertion length = 30 000 (1 181)
 Applicable for liquids and solids applications. Cable can be shortened on site.

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Insertion length does not include any raised face/gasket face dimension
 (see Flange Facing Table above)

Pointek CLS200 flanged process connections, dimensions in mm (inch)


Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Standard

Circuit diagrams


Wiring: Pointek CLS200 standard

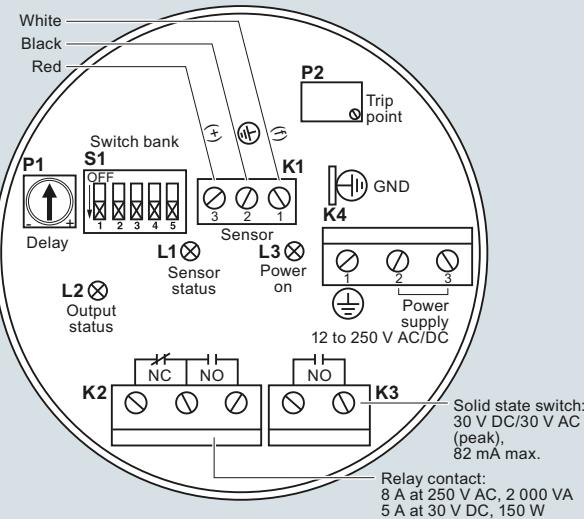

Notes:

- Identification label is on underside of lid. Switch and potentiometer settings are for illustration purposes only (refer to operation/setup in manual).
- All field wiring must have insulation suitable for at least 250 V.
- Relay contact terminals are for use with equipment having no accessible live parts and wiring having insulation suitable for at least 250 V.
- Maximum working voltage between adjacent relay contacts shall be 250 V.
- Refer to the Instruction Manual or contact Siemens representative for detailed wiring information.

Wiring: Pointek CLS200 Digital

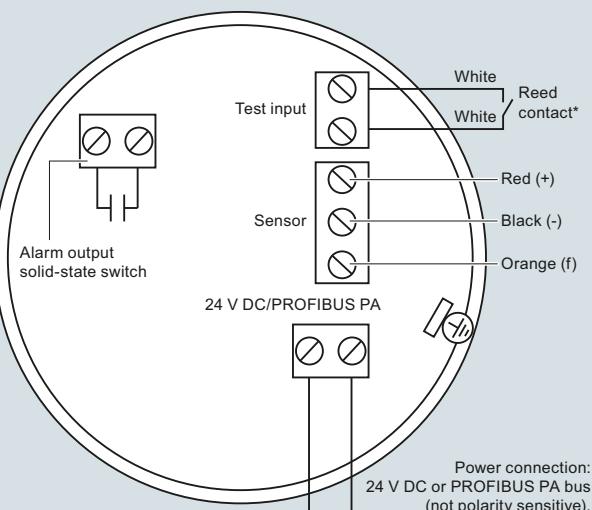

Notes:

Refer to the instruction manual or contact a Siemens representative for detailed wiring information.

***Magnet activated sensor Test**

A magnet can be used to test the sensor without opening the lid of the Pointek CLS200 Digital version. Bring the magnet close to the test area indicated on the enclosure. The sensor test starts and finishes automatically after 10 seconds.



Pointek CLS200 connections

Overview

Pointek CLS200 (digital version) is a versatile inverse frequency shift capacitance level and material detection switch with optional rod/cable choices and configurable output. CLS200 is ideal for detection of liquids, solids, slurries, foam, and interfaces and has the ability to tune out buildup on the probe. The digital version includes PROFIBUS PA, an LCD display, and advanced diagnostic features.

Benefits

- Potted construction protects signal circuit from shock, vibration, humidity, and/or condensation
- High chemical resistance
- Level detection independent of tank or pipe earth reference
- Insensitive to product buildup due to high frequency oscillation
- High sensitivity allows installation in a wide range of liquids, solids or slurry applications
- Integral LCD display allows for easy menu-driven setup
- PROFIBUS PA communication (SIMATIC PDM compatible)

Application


Pointek CLS200 digital version provides an integral LCD display for stand-alone use, and also provides PROFIBUS PA communication (Profile version 3.0, Class B) for connection to a network.

The power supply is galvanically isolated and accepts a wide range of voltages (12 to 30 V DC). When used with thermal isolator, the stainless steel and PPS (PVDF optional) materials used in the probe construction provide a temperature rating up to 125 °C (257 °F) on the process wetted portion of the probe. The switch responds to any material with a dielectric constant of 1.5 or more by detecting a change in oscillating frequency, and it can be set to detect before contact or on contact with the probe. The menu-driven setup allows precise control of the switch point signal damping and alarm functions.

When connected to the PROFIBUS network, advanced diagnostics and set up using SIMATIC PDM are possible.

The CLS200 operates independently of the tank wall or pipe so it does not require an external reference electrode for level detection in a non-conductive vessel such as concrete or plastic (EMC regulations applicable in some regions).


- Key Applications: liquids, slurries, powders, granules, pressurized applications, hazardous areas

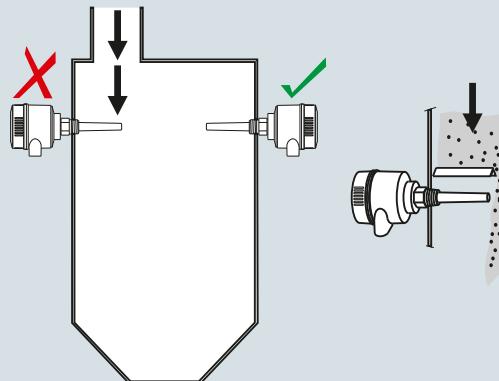Configuration**Installation**

Keep unit out of path of falling material, or protect probe from falling material.



Avoid areas where material build up occurs.

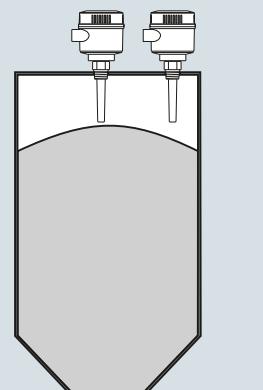

Install probe at least 50 (2) from tank wall.

Pointek CLS200 installation, dimensions in mm (inch)

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Technical specifications

Mode of operation	Power supply
Measuring principle	Standard: 12 ... 30 V DC Intrinsically Safe: 12 ... 24 V DC
Input	Current consumption
Measured variable	12.5 mA
Output	Certificates and approvals
Output signal	General Purpose
• Solid-state output	CSA, FM, CE, RCM
- Output	ATEX II 1/2 D T100 °C
- Protection	CSA/FM Class II, Div. 1, Groups E, F, G
- Max. switching voltage	CSA/FM Class III T4
- Max. load current	Flameproof Enclosure with IS Probe
- Voltage drop	ATEX II 1/2 G EEx d[ia] IIC T6 ... T4
- Time delay (ON and/or OFF)	ATEX II ½ D T100 °C
• Fail-safe mode	Explosion Proof with IS Probe
• Connection	CSA/FM Class I, Div. 1, Groups A, B, C, D
Rated operating conditions¹⁾	CSA/FM Class II, Div. 1, Groups E, F, G
Installation conditions	CSA/FM Class III T4
• Location	Intrinsic safety
Ambient conditions	ATEX II 1 G EEx ia IIC T6 ... T4
• Ambient temperature	ATEX II ½ D IP6X T100 °C
• Storage temperature	CSA/FM Class I, Div. 1, Groups A, B, C, D
• Installation category	CSA/FM Class II, Div. 1, Groups E, F, G
• Pollution degree	CSA/FM Class III T4
Medium conditions	Non-incendive
• Relative dielectric constant ϵ_r	CSA/FM Class I, Div. 2, Groups A, B, C, D
• Process temperature	CSA/FM Class II, Div. 2, Groups F, G
- Without thermal isolator	CSA/FM Class III T4 or T6
- With thermal isolator	Non-Sparking
• Process pressure (rod version)	ATEX II 3 G Ex nA II T6 ... T4
• Process pressure (cable version) ³⁾	ATEX II 2 D IP6X T100 °C
• Process pressure (sliding coupling version)	Marine
Design	Lloyds Register of Shipping, Categories ENV1, ENV2, and ENV5
Material	Others
• Enclosure	Pattern Approval (China)
• Optional thermal isolator	Communication
Connection	PROFIBUS PA (IEC 61158 CPF3 CP3/2) Bus physical layer: IEC 61158-2 MBP (IS) Device profile: PROFIBUS PA profile for Process Control Devices Version 3.0, Class B FISCO field device
Degree of protection	¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 5/36.
Cable inlet	²⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)
Electromagnetic compatibility	³⁾ Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 5/34.

Technical specifications (continued)**Design: Probe**

	Rod version	Sanitary version	Cable version	Sliding Coupling version
Max. length	5 500 mm (216.53 inch)	5 500 mm (216.53 inch)	<ul style="list-style-type: none"> • 30 000 mm (1 181.1 inch) liquids and slurries • 5 000 mm (196.85 inch) solids (under loads) 	5 500 mm (216.53 inch)
Process connection	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	1 $\frac{1}{2}$ ", 2" sanitary fitting clamp 316L stainless steel	R $\frac{3}{4}$ ", ", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 316L stainless steel ASME/EN flange	R $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] $\frac{3}{4}$ ", 1", 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] G $\frac{3}{4}$ ", 1", 1 $\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]
Extension material	316L stainless steel optional PFA coated ¹⁾	316L stainless steel	Fluoroethylene propylene (FEP) cable with stainless steel core	316L stainless steel
Sensor wetted parts	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)	PPS (optional PVDF)
O-ring seal material	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾	FKM (optional FFKM) ²⁾
Thermal isolator ³⁾	Optional	Optional	Optional	Optional
Extension	User selected length	User selected length	Cable extension	User selected length

¹⁾ 1PFA coating (7ML5634 and 7ML5644) has 120 micron thickness

²⁾ For caustic materials, consult a local sales person for alternative O-rings. For more information, please visit http://www.automation.siemens.com/aspa_app.

³⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F).


Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Selection and ordering data	Article No.	Article No.
Pointek CLS200 RF Capacitance point level switch, digital, rod design Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe. With display and digital communications.	7ML5640- 0	7ML5640- 0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Process connection		
Threaded, 316L stainless steel		
¾" NPT [(Taper), ANSI/ASME B1.20.1]	0 A	M
1" NPT [(Taper), ANSI/ASME B1.20.1]	0 B	N
1¼" NPT [(Taper), ANSI/ASME B1.20.1]	0 C	P
1½" NPT [(Taper), ANSI/ASME B1.20.1]	0 D	Q
R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 A	R
R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 B	S
R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203]	1 D	
G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 A	0
G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 B	1
G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	3 D	
Welded flange, 316L stainless steel, raised face		
1" ASME, 150 lb	5 A	
1" ASME, 300 lb	5 B	
1" ASME, 600 lb	5 C	
1½" ASME, 150 lb	5 D	
1½" ASME, 300 lb	5 E	
1½" ASME, 600 lb	5 F	
2" ASME, 150 lb	5 G	
2" ASME, 300 lb	5 H	
2" ASME, 600 lb	5 J	
3" ASME, 150 lb	5 K	
3" ASME, 300 lb	5 L	
3" ASME, 600 lb	5 M	
4" ASME, 150 lb	5 N	
4" ASME, 300 lb	5 P	
4" ASME, 600 lb	5 Q	
Welded flange, 316L stainless steel, type A flat faced		
DN 25, PN 16	6 A	
DN 25, PN 40	6 B	
DN 40, PN 16	6 C	
DN 40, PN 40	6 D	
DN 50, PN 16	6 E	
DN 50, PN 40	6 F	
DN 80, PN 16	6 G	
DN 80, PN 40	6 H	
DN 100, PN 16	6 J	
DN 100, PN 40	6 K	
(Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)		
Probe length	A	
(length from flange face) (threaded lengths include process thread)	B	
<u>Note: No Y01 needed in Order code for standard lengths</u>	C	
Compact [threaded 120 mm (4.72 inch), Flanged 98 mm (3.86 inch)]	D	
Extended rod, 250 mm (9.84 inch)	E	
Extended rod, 350 mm (13.78 inch)	F	
Extended rod, 500 mm (19.69 inch)	G	
Extended rod, 750 mm (29.53 inch)	H	
Extended rod, 1 000 mm (39.37 inch)	J	
Extended rod, 1 250 mm (49.21 inch)	K	
Extended rod, 1 350 mm (53.15 inch)	L	
Extended rod, 1 500 mm (59.06 inch)		
Extended rod, 1 750 mm (68.90 inch)		
Extended rod, 2 000 mm (78.74 inch)		
Enclosure and lid		
Aluminum epoxy coated	A	
2 x ½" NPT via adapter - cable inlet, IP65	B	
2 x M20 x 1.5 cable inlet, IP65	C	
2 x ½" NPT via adapter - cable inlet, IP68	D	
2 x M20 x 1.5 cable inlet, IP68		

¹⁾ Barrier or Intrinsically Safe power supply required for Intrinsically Safe protection.
²⁾ Available with Approvals options F, G, H, J, and K.

Selection and ordering data	Order code	Article No.
Further designs Please add "-Z" to Article No. and specify Order code(s).		7ML5641- 
Total insertion length: enter the total insertion length in plain text description	Y01	Detects level and interface in liquids, solids, slurries, and foam. Cable extension options to 30 m (98.43 ft), adaptable sensitivity, with the ability to tune out build-up on probe. With display and digital communications.
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15	↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11	Process connection
Material inspection certificate Type 3.1 per EN 10204	C12	Threaded, 316L stainless steel
INMETRO ¹⁾	E34	$\frac{3}{4}$ " NPT [(Taper), ANSI/ASME B1.20.1] 0 A 1" NPT [(Taper), ANSI/ASME B1.20.1] 0 B $\frac{1}{4}$ " NPT [(Taper), ANSI/ASME B1.20.1] 0 C $\frac{1}{2}$ " NPT [(Taper), ANSI/ASME B1.20.1] 0 D R $\frac{3}{4}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] 1 A R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] 1 B R $1\frac{1}{2}$ " [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] 1 D G $\frac{3}{4}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 3 A G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 3 B G $1\frac{1}{2}$ " [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] 3 D
Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation		Welded flange, 316L stainless steel, raised face
Accessories	See page 4/41	1" ASME, 150 lb 5 A 1" ASME, 300 lb 5 B 1" ASME, 600 lb 5 C $1\frac{1}{2}$ " ASME, 150 lb 5 D $1\frac{1}{2}$ " ASME, 300 lb 5 E $1\frac{1}{2}$ " ASME, 600 lb 5 F 2" ASME, 150 lb 5 G 2" ASME, 300 lb 5 H 2" ASME, 600 lb 5 J 3" ASME, 150 lb 5 K 3" ASME, 300 lb 5 L 3" ASME, 600 lb 5 M 4" ASME, 150 lb 5 N 4" ASME, 300 lb 5 P 4" ASME, 600 lb 5 Q
		Welded flange, 316L stainless steel, Type A flat faced
		DN 25, PN 16 6 A DN 25, PN 40 6 B DN 40, PN 16 6 C DN 40, PN 40 6 D DN 50, PN 16 6 E DN 50, PN 40 6 F DN 80, PN 16 6 G DN 80, PN 40 6 H DN 100, PN 16 6 J DN 100, PN 40 6 K
		(Note: flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Selection and ordering data	Article No.	Article No.
Pointek CLS200 RF Capacitance point level switch, digital, cable design	7ML5641-	7ML5641-
Detects level and interface in liquids, solids, slurries, and foam. Cable extension options to 30 m (98.43 ft), adaptable sensitivity, with the ability to tune out build-up on probe. With display and digital communications.	- 0	- 0
Probe length (length from flange face) (threaded lengths include process thread)		
Note: No Y01 needed in Order code for standard lengths	A	A
Extended cable, 3 000 mm (118.11 inch), length can be determined by customer on assembly	B	B
Extended cable, 6 000 mm (236.22 inch), length can be determined by customer on assembly	C	C
Add Order code Y01 and plain text: "Insertion length ... mm"	D	D
Extended cable, 500 ... 5 000 mm (19.69 ... 196.85 inch)	E	
Extended cable, 5 001 ... 10 000 mm (196.89 ... 393.70 inch)	F	
Extended cable, 10 001 ... 15 000 mm (393.74 ... 590.55 inch)	G	
Extended cable, 15 001 ... 20 000 mm (590.59 ... 787.40 inch)	H	
Extended cable, 20 001 ... 25 000 mm (787.44 ... 984.25 inch)	I	
Extended cable, 25 001 ... 30 000 mm (984.29 ... 1 181.10 inch)	J	
Thermal isolator	K	
Without thermal isolator	L	
With thermal isolator [for process connection temperatures over 85 °C (185 °F)]		
Remote mount electronics and mounting bracket		
With 2 m (79 inch) of cable ²⁾	0	Y01
With 5 m (197 inch) of cable ²⁾	1	Y15
Wetted seals	2	C11
FFKM and PTFE	3	C12
FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]	0	E34
Probe material	1	
FEP jacketed cable with PPS probe body	0	
FEP jacketed cable with PVDF probe body	1	
Approvals	B	
Non-Sparking: CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C	C	
Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C	D	
Intrinsically Safe: ¹⁾ CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C	E	
Flameproof Enclosure with IS Probe: CE, RCM, ATEX II 1/2 G EEx d[ia] IIC T6 ... T4, ATEX II 1/2 D T100 °C	F	
Non-incendive: CSA/FM Class I, Div. 2, Groups A, B, C, D CSA/FM Class II, Div. 2, Groups F, G CSA/FM Class III T4 or T6	G	
Dust Ignition Proof with IS Probe: CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	H	
Intrinsically Safe: ¹⁾ CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	J	
Explosion Proof with IS Probe: CSA/FM Class I, Div. 1, Groups A, B, C, D CSA/FM Class II, Div. 1, Groups E, F, G CSA/FM Class III T4	K	
General Purpose (CSA, FM)	L	
General Purpose (CE, RCM)		
Further designs		Order code
Please add "-Z" to Article No. and specify Order code(s).		
Total insertion length: enter the total insertion length in plain text description	Y01	
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15	
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000	C11	
Material inspection Certificate Type 3.1 per EN 10204	C12	
INMETRO ¹⁾	E34	
Operating Instructions		
All literature is available to download for free, in a range of languages, at		
http://www.siemens.com/processinstrumentation/documentation		
Accessories		See page 4/41
1) Available only with Approvals options C and E.		

Selection and ordering data	Article No.	Article No.
Pointek CLS200 RF Capacitance point level switch, digital, sanitary rod design. Detects level and interface in liquids, solids, slurries, and foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe. With display and digital communications. ↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML5642- 0 8 A 8 B 8 C 8 D 8 E A B C D E F G H J K L M N P Q R S T 0 1 2 3 0 1 B C D E	7ML5642- 0 F G H J K L A B C D Y01 Y15 C11 C12 E34 See page 4/41
Process connection Sanitary 316L stainless steel 1" sanitary fitting clamp 1½" sanitary fitting clamp 2" sanitary fitting clamp 2½" sanitary fitting clamp 3" sanitary fitting clamp (Note: Sanitary connection dimensionally corresponds to the applicable ISO 2852 standard.)		
Probe length (length from process connection face) Note: No Y01 needed in Order code for standard lengths Compact, 98 mm (3.86 inch) Extended rod, 250 mm (9.84 inch) Extended rod, 350 mm (13.78 inch) Extended rod, 500 mm (19.69 inch) Extended rod, 750 mm (29.53 inch) Extended rod, 1 000 mm (39.37 inch) Extended rod, 1 250 mm (49.21 inch) Extended rod, 1 350 mm (53.15 inch) Extended rod, 1 500 mm (59.06 inch) Extended rod, 1 750 mm (68.90 inch) Extended rod, 2 000 mm (78.74 inch)		
Add Order code Y01 and plain text: "Insertion length ... mm" Extended rod, 110 ... 350 mm (4.3 ... 13.78 inch) Extended rod, 351 ... 1 000 mm (13.82 ... 39.37 inch) Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch) Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch) Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch) Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch) Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)		
Thermal isolator Without thermal isolator With thermal isolator [for process connection temperatures over 85 °C (185 °F)]	0 1 0 1 0 1 B C D E	
Remote mount electronics and mounting bracket With 2 m (79 inch) of cable ²⁾ With 5 m (197 inch) of cable ²⁾	2 3	
Wetted seals FKM FFKM [for process temperatures above -20 °C (-4 °F)]	0 1	
Probe material 316L stainless steel with PPS probe body 316L stainless steel with PVDF probe body	0 1	
Approvals Non-Sparking: CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C Dust Ignition Proof: CE, RCM, ATEX II ½ D T100 °C Intrinsically Safe: ¹⁾ CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II ½ D IP6X T100 °C Flameproof Enclosure with IS Probe: CE, RCM, ATEX II ½ G EEx d[ia] IIC T6 ... T4, ATEX II ½ D T100 °C		

Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Selection and ordering data	Article No.	Article No.
Pointek CLS200 RF Capacitance point level switch, digital, sliding coupling design. Detects level and interface in liquids, solids, slurries, and, foam. Adjustable, 5.5 m (18.04 ft), insertion, adaptable sensitivity, with the ability to tune out build-up on probe. With display and digital communications.	7ML5643- 0	7ML5643- 0
↗ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Process connection		
Threaded, 316L stainless steel ¾" NPT [(Taper), ANSI/ASME B1.20.1] 1" NPT [(Taper), ANSI/ASME B1.20.1] 1¼" NPT [(Taper), ANSI/ASME B1.20.1] 1½" NPT [(Taper), ANSI/ASME B1.20.1] R ¾" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] R 1½" [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G ¾" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] G 1½" [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	0 A 0 B 0 C 0 D 1 A 1 B 1 D 3 A 3 B 3 D	E F G H J K L
Probe length (length from flange face) (threaded lengths include process thread)	C D E F G H J K L	A B C D
Note: No Y01 needed in Order code for standard lengths	M N P Q R S	
Extended rod, 350 mm (13.78 inch) Extended rod, 500 mm (19.69 inch) Extended rod, 750 mm (29.53 inch) Extended rod, 1 000 mm (39.37 inch) Extended rod, 1 250 mm (49.21 inch) Extended rod, 1 350 mm (53.15 inch) Extended rod, 1 500 mm (59.06 inch) Extended rod, 1 750 mm (68.90 inch) Extended rod, 2 000 mm (78.74 inch)	0 1	
Add Order code Y01 and plain text: "Insertion length ... mm"	2 3	
Extended rod, 350 ... 1 000 mm (13.82 ... 39.37 inch) Extended rod, 1 001 ... 2 000 mm (39.41 ... 78.74 inch) Extended rod, 2 001 ... 3 000 mm (78.78 ... 118.11 inch) Extended rod, 3 001 ... 4 000 mm (118.15 ... 157.48 inch) Extended rod, 4 001 ... 5 000 mm (157.52 ... 196.85 inch) Extended rod, 5 001 ... 5 500 mm (196.89 ... 216.53 inch)	0 1	
Thermal isolator Without thermal isolator With thermal isolator [for process connection temperatures over 85 °C (185 °F)]	B C D	
Remote mount electronics and mounting bracket With 2 m (79 inch) of cable ²⁾ With 5 m (197 inch) of cable ²⁾		
Wetted seals FKM and PTFE FFKM and PTFE [for process temperatures above -20 °C (-4 °F)]		
Probe material 316L stainless steel with PPS probe body 316L stainless steel with PVDF probe body		
Approvals Non-Sparking: CE, RCM, ATEX II 3 G Ex nA II T6 ... T4, ATEX II 2 D IP6X T100 °C Dust Ignition Proof: CE, RCM, ATEX II 1/2 D T100 °C Intrinsically Safe: ¹⁾ CE, RCM, ATEX II 1 G EEx ia IIC T6 ... T4, ATEX II 1/2 D IP6X T100 °C		
Further designs Please add "-Z" to Article No. and specify Order code(s).		
Total insertion length: enter the total insertion length in plain text description		
Stainless steel tag [70 x 13 mm (2.75 x 0.5 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text		
Manufacturer's test certificate: M to DIN 55350, Part 18 and ISO 9000		
Material inspection Certificate Type 3.1 per EN 10204		
INMETRO ¹⁾		
Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation		
Accessories		
See page 4/41		

Selection and ordering data**Article No.****Options****Accessories**

SensGuard, $\frac{3}{4}$ " NPT (PPS).
Only available for CLS200 with $\frac{3}{4}$ " NPT thread.

SensGuard, R 1" (BSPT) (PPS).
Only available for CLS200 with $\frac{3}{4}$ " NPT thread.

One metallic cable gland M20 x 1.5, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, with integrated shield connection (available for PROFINET PA)

General Purpose

$\frac{1}{2}$ " NPT General Purpose Cable Entry IP68/IP69K NEMA 6, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, cable size 6 ... 12 mm (0.236 ... 0.472 inch)

M20 x 1.5 General Purpose Cable Entry IP68/IP69K NEMA 6, -40 ... +80 °C (-40 ... +176 °F), Dust Ignition Proof, cable size 7 ... 12 mm (0.275 ... 0.472 inch)

Hazardous Locations

$\frac{1}{2}$ " NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD Exd A21 (Zone 1, Zone 2, Zone 21, Zone 22, and in Gas Groups IIA, IIB and IIC) 60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)


M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD Exd A21 (Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC) 60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)

Blind threaded flanges are available.

Customers interested in a custom designed device should consult a local sales person.
For more information, please visit
http://www.automation.siemens.com/aspa_app.

7ML1830-1DL**7ML1830-1DM****7ML1930-1AQ****7ML1830-1JA****7ML1830-1JC****7ML1830-1JB****7ML1830-1JD**

See page 4/70

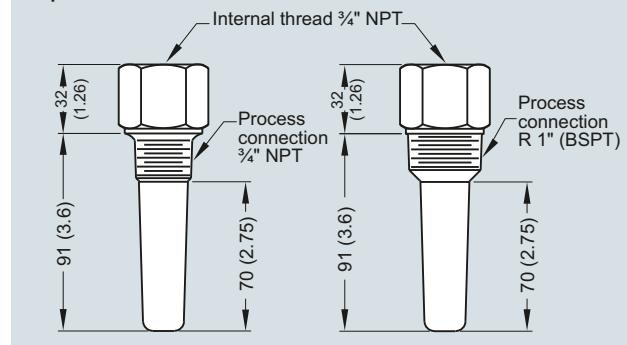Optional SensGuard

Optional SensGuard, dimensions in mm (inch)

Pointek Specials


Level measurement

Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Characteristic curves


Pressure/temperature curve
CLS200 sliding coupling
threaded process connections
(7ML5633 and 7ML5643)

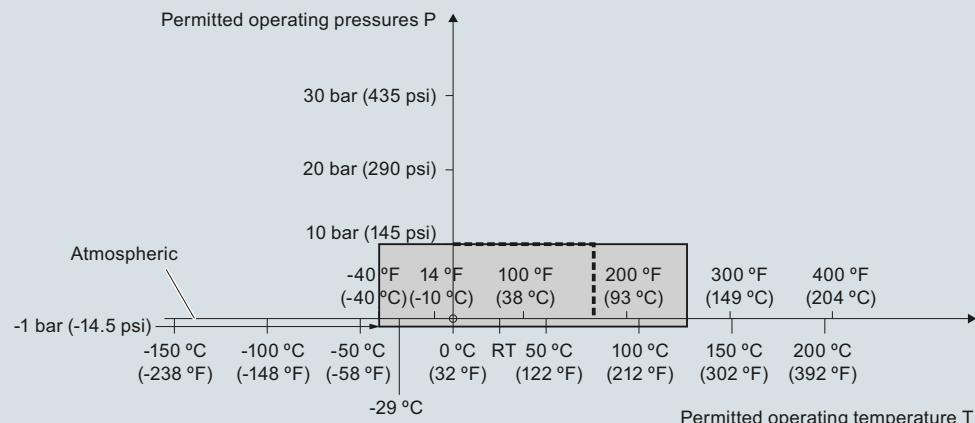

----- Example:
Permitted operating pressure = 10 bar (145 psi) at 75 °C

Pointek CLS200 process pressure/temperature derating curves (7ML5633 and 7ML5643)


Pressure/temperature curve
CLS200 cable
Threaded process connections
(7ML5631 and 7ML5641)

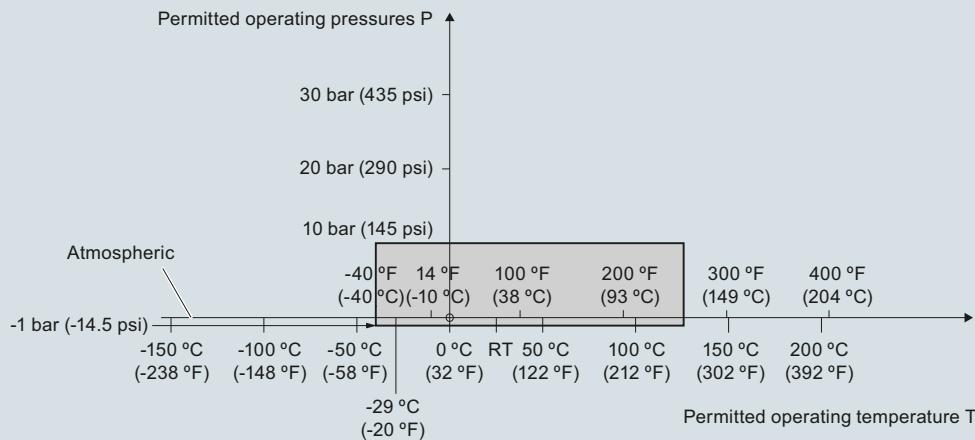

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)


Characteristic curves (continued)

Pressure/temperature curve
CLS200 compact and extended rod
Threaded process connections
 (7ML5630 and 7ML5640)

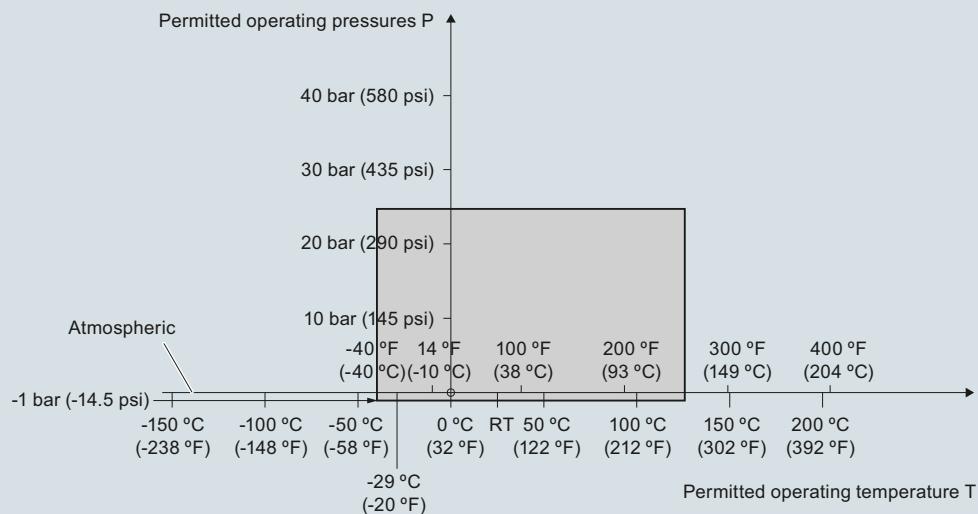

Pointek CLS200 process pressure/temperature derating curves (7ML5630 or 7ML5640)

Pressure/temperature curve
CLS200 compact and extended sanitary type
Sanitary process connections
 (7ML5632 and 7ML5642)

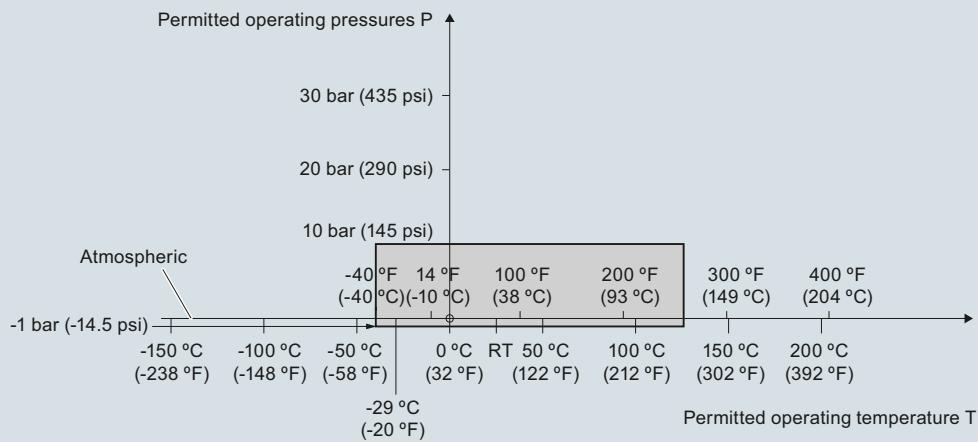

Pointek CLS200 process pressure/temperature derating curves (7ML5632 and 7ML5642)

Level measurement

Point level measurement
RF Capacitance switches


Pointek CLS200 - Digital

Characteristic curves (continued)

Pressure/temperature curve

CLS200, cable

ASME flanged process connections
(7ML5631 and 7ML5641)

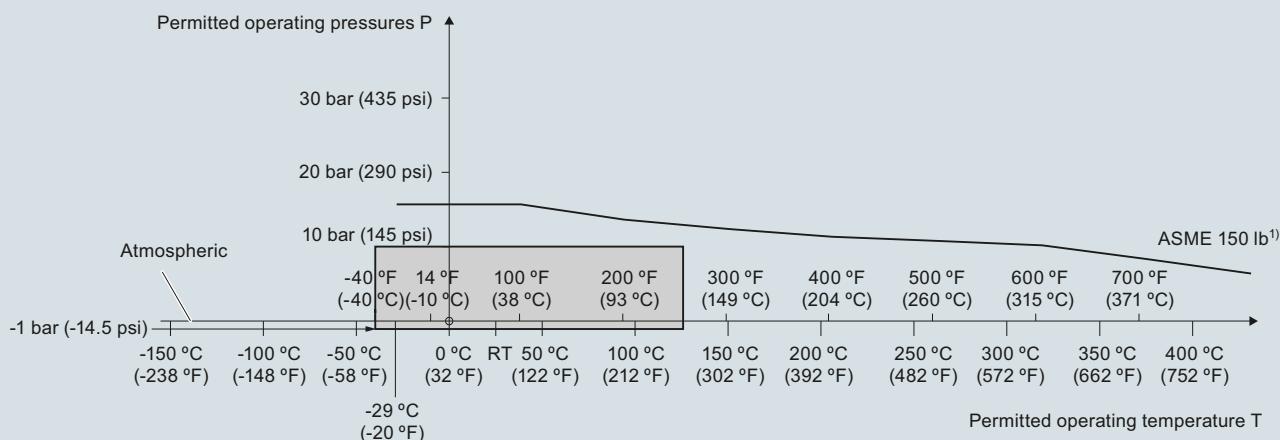


¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

Pressure/temperature curve

CLS200 compact and extended rod

ASME flanged process connections
(7ML5630 and 7ML5640)

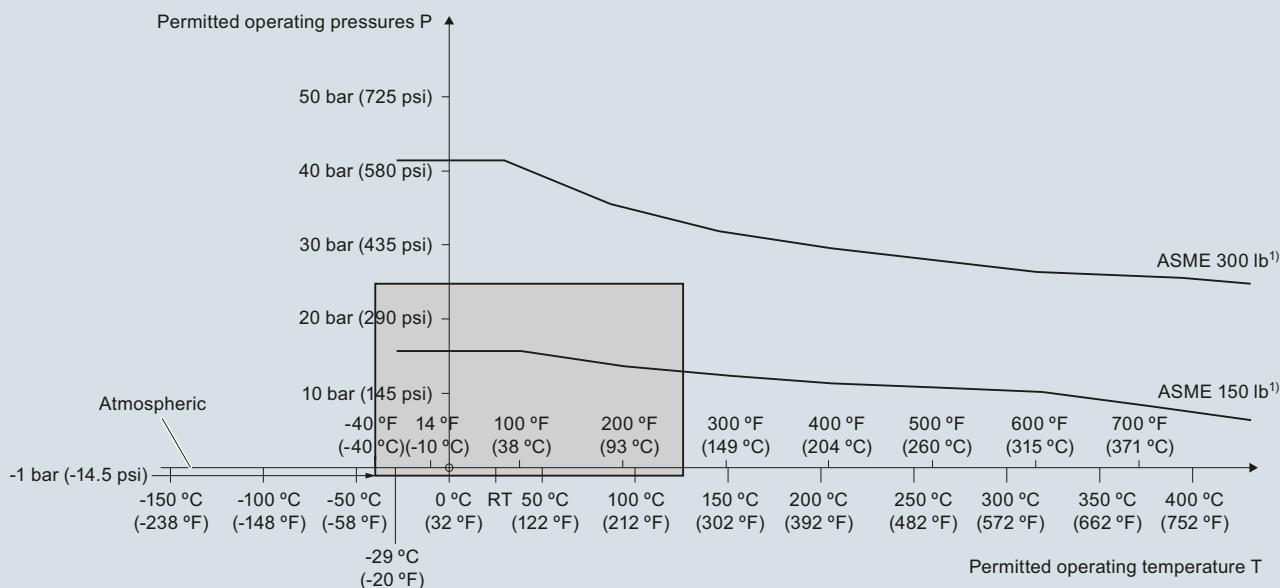

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

Characteristic curves (continued)

Pressure/temperature curve

CLS200 cable

EN flanged process connections
 (7ML5631 and 7ML5641)

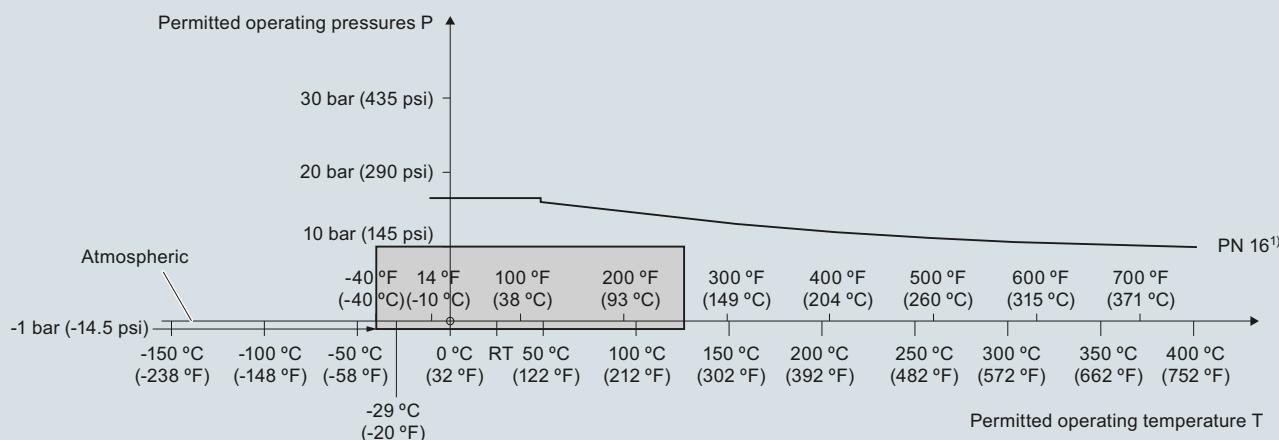


¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5631 and 7ML5641)

Pressure/Temperature Curve

CLS200 Compact and Extended Rod
 EN Flanged Process Connections
 (7ML5630 and 7ML5640)

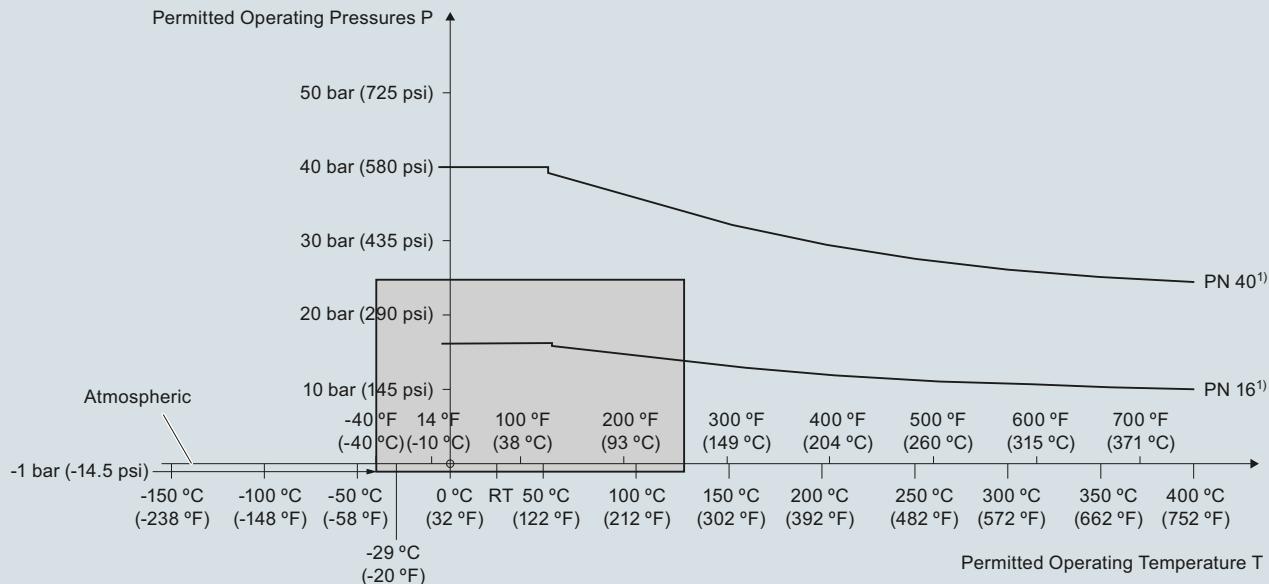

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS200 process pressure/temperature derating curves (7ML5630 and 7ML5640)

Level measurement

Point level measurement
RF Capacitance switches


Pointek CLS200 - Digital

Dimensional drawings

Compact version

Threaded


(7ML5630 and 7ML5640)

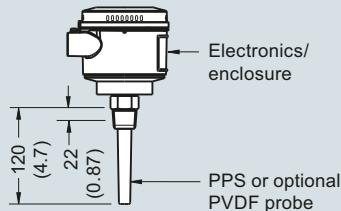

Sanitary compact version

Sanitary fitting


(7ML5632 and 7ML5642)

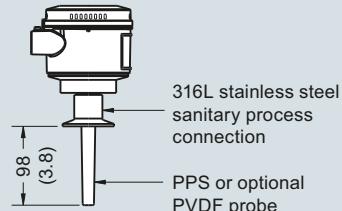

Extended rod version

Threaded


(7ML5630 and 7ML5640)

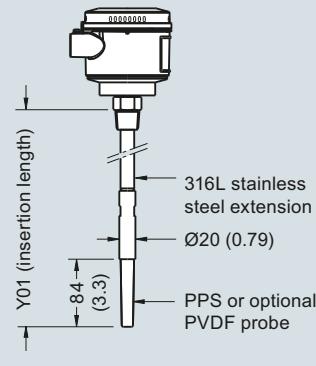

Extended cable version

Threaded

(7ML5631 and 7ML5641)

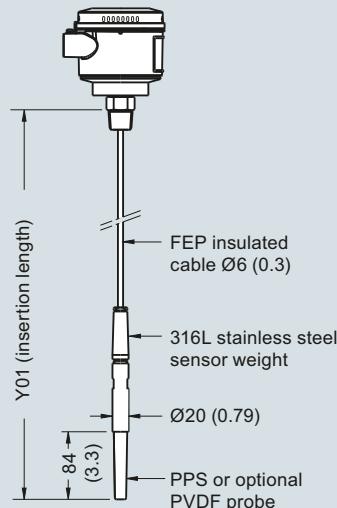

Min. insertion length = 500 (19.69)
Max. insertion length = 30 000 (1 181)
Applicable for liquids and solids applications. Cable can be shortened on site.

2 cable entries
1/2" NPT or
M20 x 1.5



Lid with window




GP, DIP lid,
without window



Sanitary extended version

Sanitary fitting


(7ML5632 and 7ML5642)

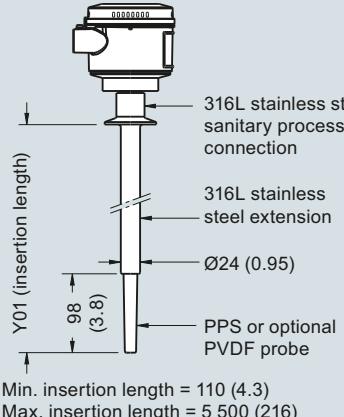

Sliding coupling version

Threaded

(7ML5633 and 7ML5643)


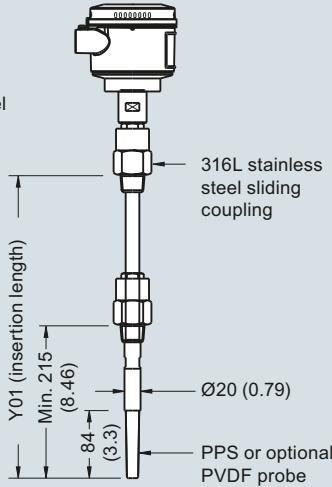


Min. insertion length = 350 (13.82)
Max. insertion length = 5500 (216)


Pointek CLS200 threaded/sanitary process connections, dimensions in mm (inch)

Dimensional drawings (continued)


Compact version
Welded Flange (7ML5630 and 7ML5640)
Welded Flange, PFA coated
(7ML5634 and 7ML5644)

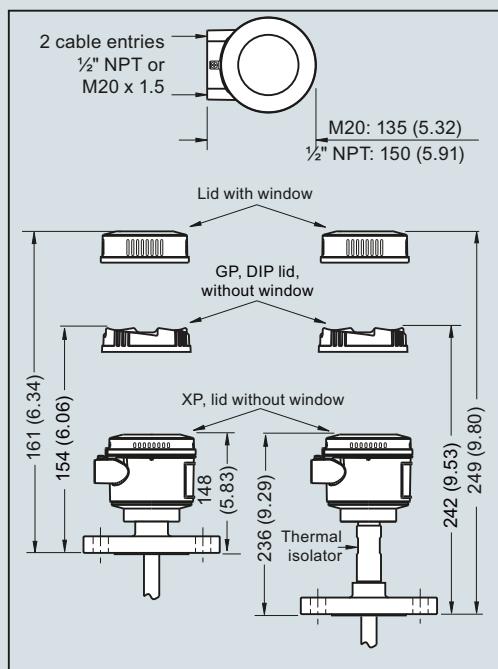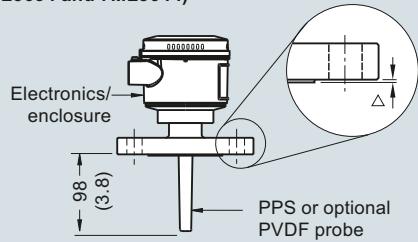

Extended rod version
Welded Flange (7ML5630 and 7ML5640)
Welded Flange, PFA coated
(7ML5634 and 7ML5644)

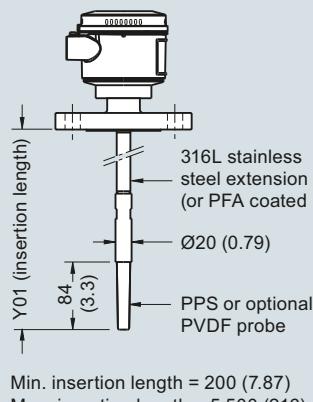

Extended cable version
Welded Flange
(7ML5631 and 7ML5641)

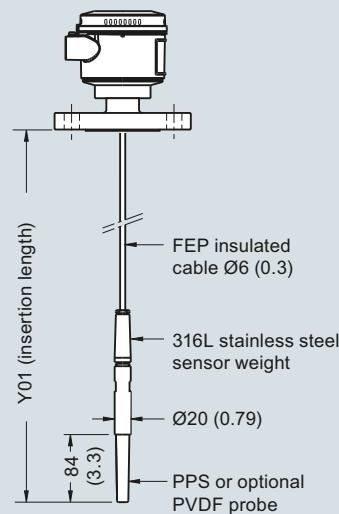

Min. insertion length = 500 (19.69)
Max. insertion length = 30 000 (1 181)
Applicable for liquids and solids applications. Cable can be shortened on site.

Flange Facing (raised face)

Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/40	2 (0.08)

Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)


Pointek CLS200 flanged process connections, dimensions in mm (inch)

Level measurement


Point level measurement
RF Capacitance switches

Pointek CLS200 - Digital

Circuit diagrams

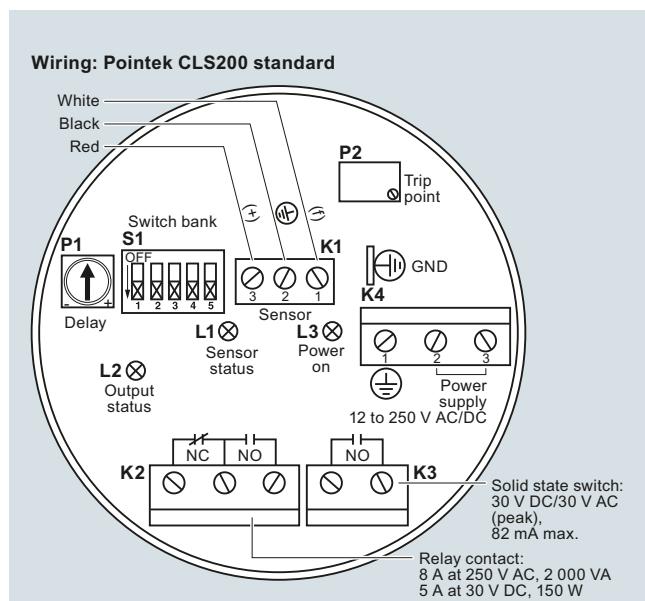

Wiring: Pointek CLS200 Digital

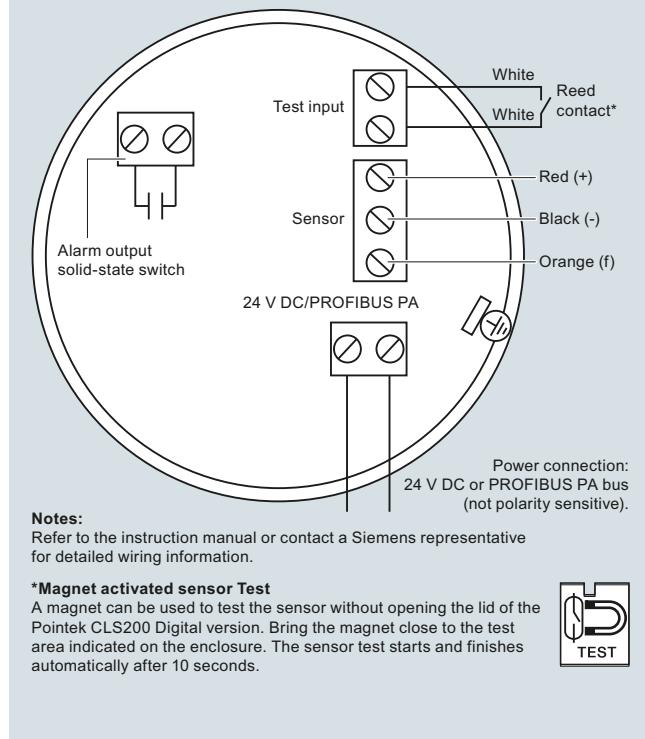

Pointek CLS200 connections

