



Dimensional drawings

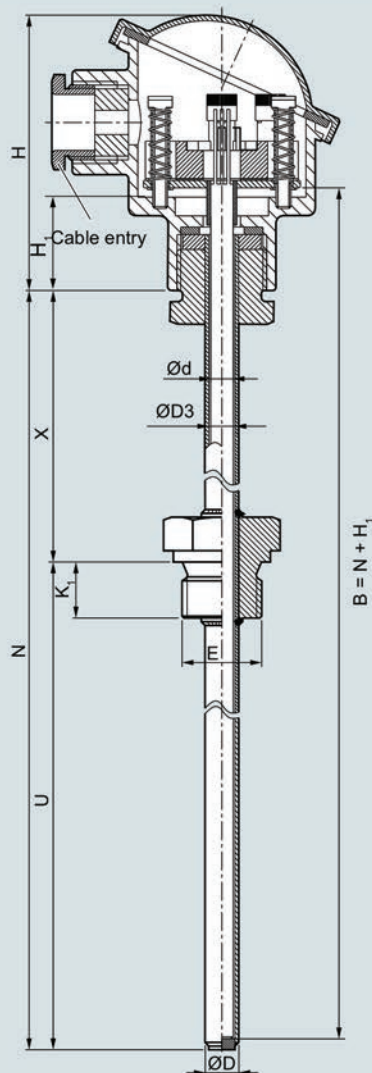

- B Measuring insert length
- Ød Measuring insert outer, diameter (6 (0.24))
- ØD Process connection, outer diameter
- ØD3 Thermowell internal diameter
- E Process connection, thread size
- H Head height
- H₁ Type Axx = 41 (1.61)
Type Bxx = 26 (1.02)
- K₁ Screw depth
- N Nominal length
- U Insertion length
- X Extension length, floor strength 3 mm

SITRANS TS500, temperature sensors for vessels and pipes, tubular thermowell for low to medium stress, according to DIN 43772, type 2G, screwed design, with extension, for screw-in depth dimensions, see page 2/15, dimensions in mm (inch).



Process connection conical, dimensions in mm (inch)

Temperature Measurement

Temperature sensors

SITRANS TS500 - Tubular thermowells

Type 2G, screwed design, with extension

Selection and Ordering data	Article No.	Ord. Code
SITRANS TS500 Tubular thermowell, low to medium stress, according to DIN 43722, Type 2G, screwed design, with extension	7MC751-	
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Material, in contact with media 316Ti (1.4571) 316L (1.4404 or 1.4435)	1 2	
Process connection Cylindrical: G½" (½" BSPP) Cylindrical: G¾" (¾" BSPP) Tapered: NPT½" Tapered: NPT¾" Tapered: NPT1" Cylindrical: M20 x 1.5 Cylindrical: M27 x 2.0 Cylindrical: M33 x 2.0	1 C 1 D 1 J 1 K 1 L 1 V 1 W 1 Y	
Thermowell form 2G, 9 mm (0.35 inch) 2G, 12 mm (0.47 inch)	A B	
Insertion length U standard 160 mm (6.30 inch) 250 mm (9.84 inch) 400 mm (15.75 inch)	0 4 1 2 2 2	
Insertion length U customer-specific enter customer specific length with Y44, see page 2/68 Order codes 80 ... 100 mm (3.15 ... 3.94 inch) Initial: 100 mm (3.94 inch) 101 ... 120 mm (3.98 ... 4.72 inch) Initial: 120 mm (4.72 inch) 121 ... 140 mm (4.76 ... 5.51 inch) Initial: 140 mm (5.51 inch) 141 ... 160 mm (5.55 ... 6.30 inch) Initial: 160 mm (6.30 inch) 161 ... 180 mm (6.34 ... 7.09 inch) Initial: 180 mm (7.09 inch) 181 ... 200 mm (7.13 ... 7.87 inch) Initial: 200 mm (7.87 inch) 201 ... 220 mm (7.91 ... 8.66 inch) Initial: 220 mm (8.66 inch) 221 ... 240 mm (8.70 ... 9.45 inch) Initial: 225 mm (8.86 inch) 241 ... 260 mm (9.49 ... 10.24 inch) Initial: 250 mm (9.84 inch) 261 ... 280 mm (10.28 ... 11.02 inch) Initial: 280 mm (11.02 inch) 281 ... 300 mm (11.06 ... 11.81 inch) Initial: 285 mm (11.22 inch) 301 ... 320 mm (11.85 ... 13.00 inch) Initial: 315 mm (12.40 inch) 321 ... 340 mm (12.64 ... 13.39 inch) Initial: 340 mm (13.39 inch) 341 ... 360 mm (13.43 ... 14.17 inch) Initial: 360 mm (14.17 inch) 361 ... 380 mm (14.21 ... 14.96 inch) Initial: 380 mm (14.96 inch) 381 ... 400 mm (14.99 ... 15.75 inch) Initial: 400 mm (15.75 inch) 401 ... 420 mm (15.79 ... 16.54 inch) Initial: 420 mm (16.54 inch) 421 ... 440 mm (16.57 ... 17.32 inch) Initial: 440 mm (17.32 inch) 441 ... 460 mm (17.36 ... 18.11 inch) Initial: 460 mm (18.11 inch) 461 ... 480 mm (18.15 ... 18.90 inch) Initial: 465 mm (18.30 inch) 481 ... 500 mm (18.94 ... 19.69 inch) Initial: 500 mm (19.69 inch)	0 1 0 2 0 3 0 4 0 5 0 6 0 7 1 1 1 2 1 3 1 4 1 5 1 6 2 0 2 1 2 2 2 3 2 4 2 5 2 6 2 7	

Selection and Ordering data	Article No.	Ord. Code
SITRANS TS500 Tubular thermowell, low to medium stress, according to DIN 43722, Type 2G, screwed design, with extension	7MC751-	
501...550 mm (19.72 ... 21.65 inch) Initial: 510 mm (20.08 inch)	3 1	
551...600 mm (21.69 ... 23.62 inch) Initial: 600 mm (23.62 inch)	3 2	
601...650 mm (23.66 ... 25.59 inch) Initial: 650 mm (25.59 inch)	3 3	
651...700 mm (25.63 ... 27.56 inch) Initial: 700 mm (27.56 inch)	3 4	
701...750 mm (27.60 ... 29.53 inch) Initial: 750 mm (29.53 inch)	3 5	
751...800 mm (29.57 ... 31.50 inch) Initial: 800 mm (31.50 inch)	3 6	
801...850 mm (31.54 ... 33.46 inch) Initial: 850 mm (33.46 inch)	3 7	
851...900 mm (33.50 ... 35.43 inch) Initial: 900 mm (35.43 inch)	4 1	
901...950 mm (35.47 ... 37.40 inch) Initial: 950 mm (37.40 inch)	4 2	
951...1 000 mm (37.44 ... 39.37 inch) Initial: 1 000 mm (39.37 inch)	4 3	
1 001...1 100 mm (39.41 ... 43.31 inch) Initial: 1 100 mm (43.31 inch)	4 4	
1 101...1 200 mm (43.35 ... 47.24 inch) Initial: 1 200 mm (47.24 inch)	4 5	
1 201...1 300 mm (47.28 ... 51.18 inch) Initial: 1 300 mm (51.18 inch)	4 6	
1 301...1 400 mm (51.22 ... 55.12 inch) Initial: 1 400 mm (55.12 inch)	4 7	
1 401...1 500 mm (55.16 ... 59.05 inch) Initial: 1 500 mm (59.05 inch)	5 1	
Extension X Standard length for Type 2G DIN 43772 (X=129 mm (5.08 inch))	1	
Extension length X - customer specific enter customer specific length with Y45, see page 2/68 Order codes 75 ... 150 mm (2.95 ... 5.91 inch) Initial: 150 mm (5.91 inch) 151 ... 300 mm (5.95 ... 11.81 inch) Initial: 300 mm (11.81 inch) 301 ... 450 mm (11.85 ... 17.72 inch) Initial: 450 mm (17.72 inch)	9 9 9	N 1 D N 2 D N 3 D


Additional configurations on page after next page.

You find ordering examples on page 2/40.


Temperature Measurement

Temperature sensors
SITRANS TS500 - Tubular thermowells


Type 2G, screwed design, with extension

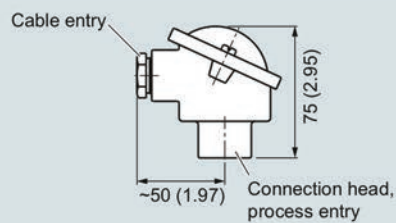


Connection head, aluminum, Type BA0, dimensions in mm (inch)

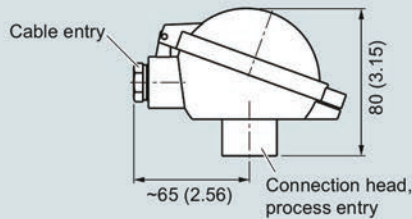


Connection head, aluminum, Type BB0, dimensions in mm (inch)

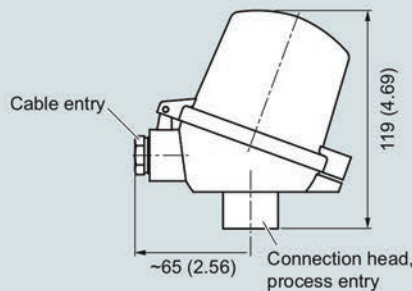


Connection head, aluminum, Type BC0, plastic, type BP0, dimensions in mm (inch)

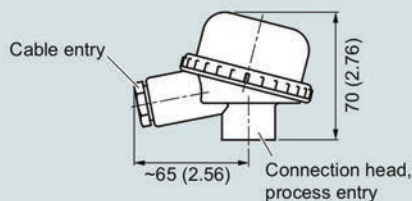

Connection head, plastic, Type BM0, dimensions in mm (inch)

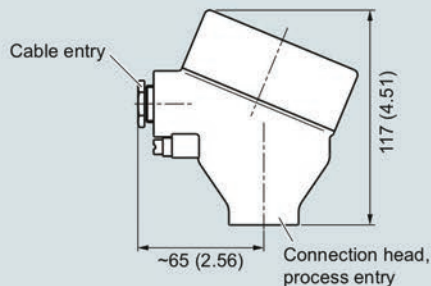

Connection head, aluminum, Type AG0, stainless steel, Type AU0, dimensions in mm (inch)

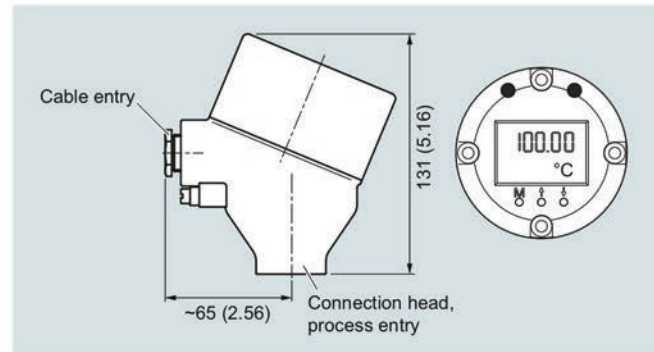

Connection head with 4-20 mA display, aluminum, Type AH0, stainless steel, Type AV0, dimensions in mm (inch)

Temperature Measurement

Temperature sensors

SITRANS TS500 - Tubular thermowells

Type 2G, screwed design, with extension

Selection and Ordering data	Article No.	Ord. Code
SITRANS TS500 Tubular thermowell, low to medium stress, according to DIN 43722, Type 2G, screwed design, with extension	7MC751-	
Head		
Aluminum head, BA0, flange cover, Standard		A
Aluminum head, BB0, low hinged cover, screw connection		B
Aluminum head, BC0, high hinged cover, screw connection		C
Aluminum head, AG0, screw cover, suitable for Ex d ¹⁾		G
Aluminum head, AH0, screw cover, suitable for Ex d, display ¹⁾		H
Plastic head, BM0, screw cover		M
Plastic head, BP0high hinged cover, screw connection		P
Stainless steel head, AU0, screw connection typesver, suitable for Ex d ¹⁾		U
Stainless steel head, AV0, screw cover, suitable for Ex d, display ¹⁾		V
Sensor²⁾		
Please note: The accuracy class range can be lower than the measuring range. For more information, see page 2/21		
Pt100, Basis, -50 ... +400 °C (-58 ... +752 °F)		A
Pt100, vibration resistant, -50 ... +400 °C (-58 ... +752 °F)		B
Pt100, expanded range, -196 ... +600 °C (-321 ... +1 112 °F)		C
Thermocouple Type K, -40 ... +1 000 °C (-40 ... +1 832 °F)		K
Thermocouple Type J, -40 ... +750 °C (-40 ... +1 382 °F)		J
Thermocouple Type N, -40 ... +1 000 °C (-40 ... +1 832 °F)		N
Sensor number/Accuracy		
Pt 100 connection: 1 x 4-wire connection or 2 x 3-wire connection, see "Measuring technology: connection types", page 2/23		
Single, basic accuracy (Class 2/Class B)		1
Single, increased accuracy (Class 1/Class A)		2
Single, highest accuracy (Class AA)		3
Double, basic accuracy (Class 2/Class B)		5
Double, increased accuracy (Class 1/Class A)		6
Double, highest accuracy (Class AA)		7

¹⁾ Ex d in connection with Order code E03

Pt1000 versions are also available. To find these, please switch to Online Configuration in the PIA Life Cycle Portal: www.siemens.com/pia-portal

Selection and Ordering data	Order code
Further designs	
Add "-Z" to Article No. and specify Order code.	
Insertion length customer-specific	Y44
Select range, enter desired length in plain text (No entry = standard length)	
Extension X length customer-specific	Y45
Select range, enter desired length in plain text (No entry = standard length)	
Options	
Add "-Z" to Article No. and add options, separate extensions with "+" .	
Built-in head transmitter	
Measuring range to be set must be specified with plain text data "Y01".	
SITRANS TH100, input 1 x Pt100, 4 ... 20 mA	T12
SITRANS TH320, input 1 x universal, 4 ... 20 mA	T24
SITRANS TH320, input 1 x universal, HART	T34
SITRANS TH420, input 2 x universal, HART	T35
SITRANS TH400, input 1 x universal, PA	T40
SITRANS TH400, input 1 x universal, PA, Ex	T41
SITRANS TH400, input 1 x universal, FF	T45
SITRANS TH400, input 1 x universal, FF, Ex	T46
Explosion protection	
Without explosion protection requirements (Europe, Australia, New Zealand)	E00
Intrinsic safety "i"/"IS" ¹⁾ according to ATEX and IECEx (Europe, Australia, New Zealand)	E01
Flameproof enclosure "d"/"XP; dust protection through housing "t"/"DIP" ²⁾ according to ATEX and IECEx (Europe, Australia, New Zealand)	E03
Non-sparking "ec" according to ATEX and IECEx (Europe, Australia, New Zealand)	E04
Without explosion protection requirements (USA, Canada) Basis FM	E10
Flameproof enclosure "d"/"XP; dust protection through housing "t"/"DIP" ²⁾ according to cFMus (USA, Canada); other connections (M, G, R)	E14
Non-sparking "nA"/"NI" according to cFMus (USA, Canada)	E16
Without explosion protection requirements (USA, Canada), Basis CSA	E17
Intrinsic safety "i"/"IS" ¹⁾ according to cCSAus (USA, Canada)	E18
Flameproof enclosure "d"/"XP; dust protection through housing "t"/"DIP" ²⁾ according to cCSAus (USA); other connections (M, G, R)	E21
Non-sparking "nA"/"NI" according to cCSAus (USA, Canada)	E23
Without explosion protection requirements (China)	E54
Intrinsic safety "i"/"IS" ¹⁾ according to NEPSI (China)	E55
Flameproof enclosure "d"; dust protection through housing "t" ²⁾ according to NEPSI (China)	E56
Non-sparking "nA"/"NI" according to NEPSI (China)	E57
Without explosion protection requirements (EAC)	E80
Intrinsic safety "i"/"IS" ¹⁾ according to EACEx (EAC)	E81
Flameproof enclosure "d"/"XP; dust protection through housing "t"/"DIP" ²⁾ according to EACEx (EAC)	E82
Non-sparking "nA"/"NI" according to EACEx (EAC)	E83
Marine approvals	
Det Norske Veritas Germanischer Lloyd (DNV GL)	D01

Selection and Ordering data	Order code
Certificates and approvals	
EN 10204-3.1 Inspection certificate for materials coming into contact with media	C12
EN 10204-3.1 Inspection certificate for hydrostatic pressure test	C31
EN 10204-3.1 Inspection certificate for helium leak test	C32
EN 10204-3.1 Inspection certificate for dye-penetration-test	C33
EN 10204-3.1 Inspection certificate: visual, measurement and functional inspection	C34
EN 10204-2.1: Declaration of compliance with the order ISO 9001 grease-free (cleaned for e.g. oxygen applications)	C35 C51
EN 10204-3.1 Acceptance test certificate "Positive Materials Identification" (PMI)	On request
Designation, calibration	
Stainless steel TAG plate , enter lettering in plain text	Y15
Plant calibration per 1 point, enter temperature in plain text	Y33
Transmitter options	
Transmitter, enter complete setting in plain text (Y01: +/-NNNN ... +/-NNNN C,F), marking on the device when Order code "Y15" is selected	Y01
Enter measuring point (max. 8 characters) in plain text	Y17
Transmitter, enter measuring point description (max. 16 characters) in plain text	Y23
Transmitter, enter measuring point text (max. 32 characters) in plain text	Y24
Transmitter, enter bus address in plain text	Y25
Transmitter, fail-safe value 3.6 mA (instead of 22.8 mA)	U36
SITRANS TH320/420 transmitter with SIL2/3 certificate	C20
Transmitter test protocol (5 points)	C11
Further options	
Connection form, flying leads (for the direct transmitter assembly, delivery without screws and springs)	G01
M12 device plug (in combination with transmitter, Non-Ex and intrinsically safe, max. IP65/67)	G12
Han 7D device plug (Non Ex and intrinsically safe, without mating connector max. IP65/67)	G13
Connection head with ½" NPT thread without cable gland, for AU0 and AH0 only IP66	G20
with outer earth screw for heads AG0, AH0, AU0 and AV0	A02
with inner earth screw for heads BC0, AG0, AH0, AU0 and AV0	A03
Option not found?	
Handling number special version	Y99

1) Please select Ex i version of the optional transmitter.

2) Only with connection heads code AG0, AH0, AU0, AV0, without cable gland (please select non-Ex version of the optional transmitter).

You find ordering examples on page 2/40.
Accessories, see page 2/251.