

Overview



SIWAREX WP321 is a versatile and flexible weigh beam for the seamless integration of a static scale into the SIMATIC automation environment.

The weighing electronics are integrated within the SIMATIC ET 200SP system series and use all the features of a modern automation system, such as integrated communication, operator control and monitoring, diagnostics units and the project planning tools in the TIA portal, SIMATIC Step 7, WinCC flexible and PCS7.

In conjunction with the digital SIWAREX DB junction box, up to four connected load cells can be diagnosed separately. This enables the weigh beam module to detect the failure of individual load cells and, in the event of an error, to provide relevant load cell data such as order number and location designation directly in the CPU or at the HMI. This increases the operational reliability of the scale, reduces downtimes, makes commissioning easier and simplifies servicing.

All messages and process values of the individual load cell channels are of course available in the SIMATIC controller.

Benefits

The electronic weighing system described here is characterized by decisive advantages:

- Uniform design technology and consistent communication in SIMATIC ET 200SP
- Compact design with only 15 mm module width
- Parameterization of the scales via the control panel, CPU or PC
- Flexible configuration options in SIMATIC TIA Portal, SIMATIC STEP 7 and PCS 7
- Measuring of weights and forces with a resolution of up to +/- 2 million parts
- 100/120/600 Hz measurement rate
- Internal scale monitoring of freely definable limit values
- Easy commissioning using the SIWATOOL software
- Automatic calibration is possible without the need for calibration weights
- Modules can be replaced without recalibrating the scale
- Direct use in ATEX Zone 2 possible
- Wide range of status and diagnostic information
- "Ready-for-use" sample program

Application

SIWAREX WP321 is the optimum solution wherever analog load cells are used for measuring tasks.

The SIWAREX WP321 is suitable for the following applications:

- Non-automatic weighing instrument (NAWI), e.g. platform and hopper scales
- Fill-level monitoring of silos and bins
- Measuring of crane and cable loads
- Force measurements
- Monitoring of belt tensions
- Setup of scales in hazardous areas

Design

SIWAREX WP321 is a technology module (TM) of the SIMATIC ET 200SP series and is thus linked to the controller in a distributed manner by means of an ET 200SP interface module (PROFIBUS/PROFINET).

The following BaseUnits (Type A0) can be used for integration:

For opening a new potential group:

BU15P-16+A10+2D (6ES7193-6BP20-0DA0)

BU15P-16+A0+2D (6ES7193-6BP00-0DA0)

For continuing the potential group:

BU15P-16+A10+2B (6ES7193-6BP20-0BA0)

BU15P-16+A0+2B (6ES7193-6BP00-0BA0)

The load cells or force sensors are connected to the terminals of the BaseUnits. This means that modules can be replaced quickly, easily and without any wiring work.

TM SIWAREX WP321 ST weighing electronics

Function

The primary task of the weighing electronics is to determine the current weight and force values on the basis of signals supplied by the connected sensors. Thanks to the seamless integration into the SIMATIC environment, values can be processed directly and in any available programming language of the CPU. If the freely selectable and internally monitored values are exceeded or undershot, this is reported directly to the controller. A variety of status and diagnostic information can also be read out and evaluated in the CPU without difficulty.


The SIWAREX WP321 is calibrated in the factory. This not only permits automatic calibration of the scales (without the need for calibration weights), but also the replacement of modules without the need for recalibration.

Via the integral RS 485 interface, a PC can be connected for setting the parameters of the weighing electronics using the "SIWATOOL" software. A USB-RS 485 interface converter is required for this purpose.

Thanks to its seamless integration into the SIMATIC environment, the use of SIWAREX weighing electronics does not require any complicated or expensive communication drivers for the scales.

Programmable weighing applications tailored to any situation can be created and then adapted or extended at any time in combination with the functionalities of the TIA Portal and of the SIMATIC Manager and WinCC flexible.


Likewise, WP321 enables scales to be set up in hazardous areas. Depending on the zone and the load cells used, the use of the SIWAREX IS Ex interface may also be necessary.

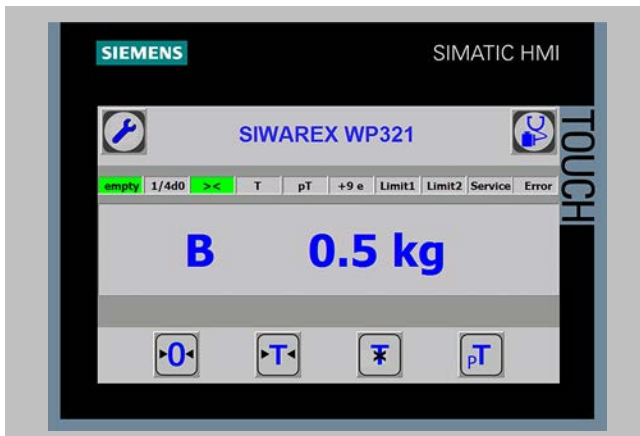

SIWAREX WP321 Ready-for-use

For an easy introduction to the integration of the module into the TIA Portal and SIMATIC Manager, a "Ready-for-use" sample project is available free of charge. This project demonstrates the integration of the module into the hardware configuration and contains the function block for communication between the CPU and SIWAREX. It also contains a ready-made data block that contains all the parameters for the scales. The "Ready for Use" project is rounded off with a touch panel configuration feature, which not only permits complete commissioning of the scales from the panel, but also includes an "operator view" that can be used to show the normal operation of the scales.

Function (continued)

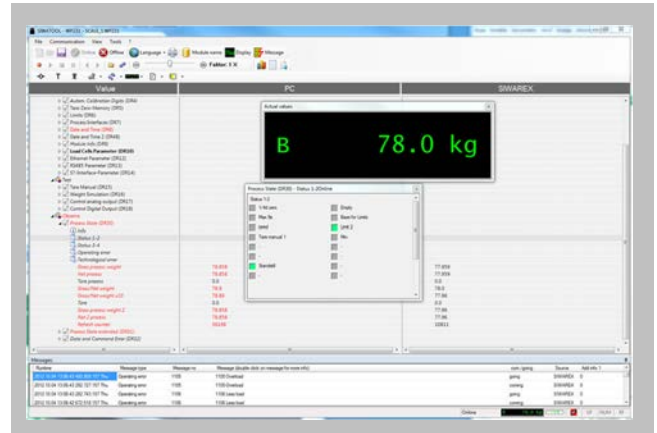

SIWAREX WP321 SIWATOOL

SIWATOOL is a service software tool which enables you to calibrate the module quickly and efficiently on site, set or reset parameters, or perform diagnostics in the event of a fault. Furthermore, complete backup files can be created for the scales, which can be uploaded to a new module with a few mouse clicks, so that the module continues to operate exactly as it did before the backup, without the need for any recalibration. It is even possible to upload configuration files that were created offline, or to read out the error buffer. No special SIMATIC knowledge is required to use SIWATOOL. It is connected via the RS 485 port of the module which requires the use of a USB-RS 485 interface converter. Please refer to the SIWAREX WP321 Equipment Manual for further recommendations.

Selection and ordering data

	Article No.
TM SIWAREX WP321 weighing electronics Single-channel, for platform scales or hopper scales with analog load cells (1 ... 4 mV/V), 1 × LC, 1 × RS 485	7MH4138-6AA00-0BA0
SIWAREX WP321 Equipment Manual Available in a range of languages Free download on the Internet at: http://www.siemens.com/weighing/documentation	
SIWAREX WP321 "Ready-for-use" TIA Portal and SIMATIC Manager sample configuration Free download on the Internet at: http://www.siemens.com/weighing/documentation	
SIWATOOL V4 & V7 Service and commissioning software for SIWAREX weighing modules	7MH4900-1AK01
SIWAREX PCS 7 AddOn Library for PCS7 V8.x and V9.0 Supports PROFINET APL faceplates and function blocks for: • SIWAREX U • SIWAREX FTA • SIWAREX FTC_B (belt scale) • SIWAREX WP321 Classic faceplate and function block for: • SIWAREX FTC_L (Loss-in-weight)	7MH4900-1AK61
Accessories (mandatory requirement)	
BaseUnit (Type A0 – one BaseUnit required for each WP321) For opening a new potential group • BU15P-16+A0+2D • BU15P-16+A10+2D For continuing the potential group • BU15P-16+A0+2B • BU15P-16+A10+2B	6ES7193-6BP00-0DA0 6ES7193-6BP20-0DA0 6ES7193-6BP00-0BA0 6ES7193-6BP20-0BA0
Shield connection for BaseUnit (5 units / for 5 scales) For laying load cell cable	6ES7193-6SC20-1AM0
Accessories (optional)	
SIWAREX EB extension box For extending sensor cables	7MH4710-2AA
SIWAREX JB junction box, aluminum enclosure For connecting up to 4 load cells in parallel, and for connecting multiple junction boxes	7MH5001-0AA20
SIWAREX JB junction box, stainless steel enclosure For connecting up to 4 load cells in parallel	7MH5001-0AA00
SIWAREX JB junction box, stainless steel enclosure (ATEX) For parallel connection of up to 4 load cells (for zone allocation, see manual or type-examination certificate)	7MH5001-0AA01

Selection and ordering data (continued)

	Article No.
SIWAREX DB digital junction box For enhanced diagnostic and monitoring options in conjunction with SIWAREX WP electronics Enclosure made of: • Aluminum • Stainless steel	7MH5001-0AD20 7MH5001-0AD01
SIWAREX IS Ex interface For intrinsically-safe connection of load cells. With ATEX approval (not UL/FM). Suitable for SIWAREX electronic weighing systems. Compatibility of load cells must be checked separately. Approved for use in the EU • Short-circuit current < 199 mA DC • Short-circuit current < 137 mA DC	7MH4710-5BA 7MH4710-5CA
Cable (optional)	
Cable Li2Y 1 × 2 × 0.75 ST + 2 × (2 × 0.34 ST) – CY For connecting SIWAREX electronic to junction box (JB), extension box (EB), digital junction box (DB), Ex interface (IS) or between two extension boxes. For permanent installation. Occasional bending is possible. External diameter: approx. 10.8 mm (0.43 inch) Permissible ambient temperature -40 ... +80 °C (-40 ... +176 °F) Sold by the meter. • Sheath color: orange • Sheath color (for hazardous atmospheres): blue	7MH4702-8AG 7MH4702-8AF
RS 485/USB interface converter Commercially available interface converter with FTDI chip, e.g. USB-Nano from CTI https://www.cti-shop.com/en/rs485-converter/usb-nano-485	
Remote display The Siebert S102 and S302 remote digital displays can be directly connected to the SIWAREX WP321 via an RS 485 interface. Siebert Industrieelektronik GmbH PO Box 1180D-65565 Eppelborn, Germany Tel: +49 6806/980-9 Fax: +49 6806/980-999 http://www.siebert-group.com/en Detailed information is available from the manufacturer.	

TM SIWAREX WP321 ST weighing electronics

Technical specifications

SIWAREX WP321	
Integration in automation systems SIMATIC S7-300, S7-400, S7-1200 and S7-1500 Other manufacturers (with restrictions)	Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET) Via SIMATIC ET 200SP interface module (PROFIBUS or PROFINET)
Communication interfaces	<ul style="list-style-type: none"> SIMATIC ET 200SP backplane bus RS 485 (SIWATOOL, Siebert remote display)
Commissioning options	<ul style="list-style-type: none"> Using SIWATOOL V7 Using function block in SIMATIC CPU / Touch Panel
Measuring accuracy According to DIN 1319-1 of full-scale value at 20 °C ± 10 K (68 °F ± 10 K) Internal resolution Measuring frequency	0.05% ± 2 million parts 100 / 120 / 600 Hz
Digital filter	Variable adjustable low-pass and average filter
Typical applications	<ul style="list-style-type: none"> Non-automatic weighing instruments Force measurements Fill-level monitoring Belt tension monitors
Weighing functions Weight values Limit values Zeroing Tare External tare specification Calibration commands	<ul style="list-style-type: none"> Gross Net Tare 2 × min/max Empty Via command by controller or HMI Via command by controller or HMI Via command by controller or HMI Via command by controller or HMI
Load cells	Full-bridge strain gauges in 4-wire or 6-wire system
Load cell powering Supply voltage (value applies at sensor, cable-related voltage drops of up to 5 V are controlled) Permissible load resistance • R _{Lmin} • R _{Lmax} With SIWAREX IS Ex interface • R _{Lmin} • R _{Lmax}	4.85 V DC ±2% > 40 Ω < 4 100 Ω > 50 Ω < 4 100 Ω
Load cell characteristic	1 ... 4 mV/V
Permissible range of measuring signal (at greatest set characteristic value)	-21.3 ... +21.3 mV
Max. distance of load cells	1000 m (459.32 ft)
Connection to load cells in Ex zone 1	Optionally via SIWAREX IS Ex interface (compatibility of the load cells must be checked)
Approvals/certificates	<ul style="list-style-type: none"> ATEX Zone 2 UL FM EAC KCC IECEx RCM
Auxiliary power supply Rated voltage Max. power consumption Max. power consumption SIMATIC Bus	24 V DC Typ. 0.1 A @ 24 V DC (0.2 A max.) 30 mA

Technical specifications (continued)

SIWAREX WP321	
IP degree of protection to EN 60529; IEC 60529	IP20
Climatic requirements $T_{min(ND)} \dots T_{max(ND)}$ (operating temperature)	
• Vertical installation in SIMATIC S7 ¹⁾	-25 ... +50 °C (-13 ... 122 °F)
• Horizontal installation in SIMATIC S7 ¹⁾	-25 ... +60 °C (-13 ... 140 °F)
EMC requirements	According to IEC 61000-6-2, IEC 61000-6-4, OIML R76-1
Dimensions (width)	15 mm (0.6 inch)

¹⁾ The S7 standard modules may not be operated at temperatures below 0 °C (32 °F). For operating conditions below 0 °C (32 °F), SIMATIC modules from the SIPLUS series must be used.