


Large Size – Alloys

When a Switch Won't Fit In the Tank, Use a Non-Intrusive Bottle Type

Bottle type level switches are ideal for large or small tanks or where access to the inside is impractical or impossible. These units mount completely outside of the tank, at the level actuation point.

LS-800-5 Series – Single Level, Brass or Stainless Steel Housing

LS-159000 Series – Low Cost, Compact Aluminum Housing

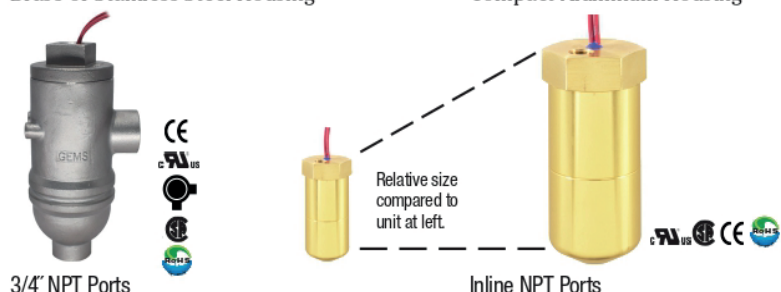

For Remote Alarms – See Page E-27

- Adjustable Volume
- Indoor Outdoor
- Solid-State



Dimensions

LS-800-5 – Brass and Stainless Steel	LS-159000
<p>†L₁ = Switch actuation level, nominal (based on a liquid specific gravity of 1.0).</p>	<p>Switch operation is NC as shown. May be changed to NO by inverting float on stem, or by mounting unit with lead wires down.</p>

Common Specifications

Electrical Termination: No. 18 AWG, 24" L., Polymeric Lead Wires (LS-800-5) / No. 22 AWG, 24" L., Polymeric Lead Wire (LS-159000).

Approvals: Series Nos. LS-800-5 and LS-159000 are U.L. Recognized – File No. E45168 and CSA listed – File No. LR-30200.

RoHS (except for LS-800-5 in Brass, part numbers 172625, 172986, and 172988) – In compliance with EU-directive 2015/863/EU requirements for chemicals and substances.

Switch Operation: Selectable, N.O. or N.C., by inverting float on unit stem.

Mounting Attitude: Vertical with lead wires up.

How To Order - Select Part Number based on specifications required.

Series Number	Materials				Min. Liquid Sp. Gr.	Pressure, PSIG, Max.	Operating Temperature	L ₁	Switch*	Part Number
	Housing	Stem and Mounting	Float	Other Wetted						
LS-800-5	Brass	316 Stainless Steel	Beryllium Copper	.75	500 @ 70°F	-40°F to +300°F (-40°C to +148.9°C)	3/4" (19 mm)	SPST, 20 VA	172625	
			SPST, 100 VA					172986		
	316 Stainless Steel	S.S. ARMCO H-15-7 MO	750	DPDT	172988					
		SPST, 20 VA		172635						
LS-159000	Aluminum	Brass	316 S.S.	.90	600 @ 70°F	-40°F to +300°F (-40°C to +148.9°C)	See Dimensions	SPST, 20 VA	144080	
			Buna N							.50
	Viton®	.50	250 @ 70°F							

*See "Electrical Data" on Page X-5 for more information. DPDT relay information is with Dimensions above.

LEVEL SWITCHES – SINGLE POINT